


System 5

Cams & dowels

Quickfit-TL dowels


- Available in Ø5mm and Ø8mm for panel-to-panel applications
- Suitable for use with all Ø15mm Cam2000 products
- 'Klix' locking feature provides a strong, vibration proof joint
- Highly tolerant in edge-inserted, TL3 also in face-inserted applications



Technical and mounting details

A	D2	Item number	S-tan	Dark grey
Drilling distance with tolerance range	Drilling diameter for dowel thread			
24 (23-25)	5	05453 →		880
34 (33-35)	5	05503 →		880
24 (23-27)	8	05441 →		880
34 (33-37)	8	05474 →		880
24 (23-25)	8	05395 →		871



Quickfit-TL2



Tolerance range

Made of zinc, plastic

Quickfit-TL3

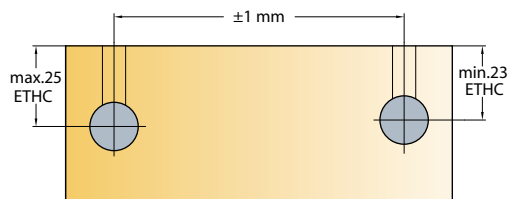

Tolerance range

2000 Pcs

Made of zinc, plastic