



FLEXYLED HE CR

DOMUS Line
design

Flexible linear LED module

Material:

flexible strip LED with adhesive

Coating:

highly transparent resin

Light source:

SMD LED with static light

Number of LED:



120/metre

Type of application:

universal



Installation:

surface or integrated into the profiles




* values referred to FLEXYLED HE CR 1000mm

Colour appearance	warm white
Colour temperature	3400 Kelvin
Luminous efficiency	85 lm/W
CRI	Ra ≥ 80



* values referred to FLEXYLED HE CR 1000mm

Colour appearance	natural white
Colour temperature	4500 Kelvin
Luminous efficiency	85 lm/W
CRI	Ra ≥ 80

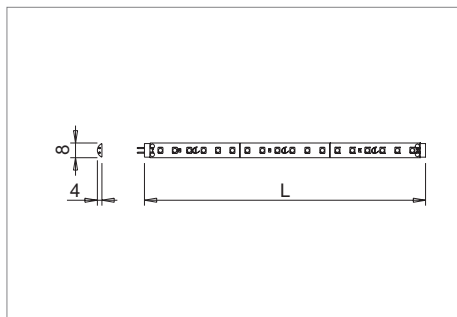

Device with non-replaceable LED module
Energy efficiency class: A++, A+, A
EU Regulation No. 874/2012



FLEXYLED HE CR _ 120 LED/metre module



Code	Length	Watt & Volt	Light colour	LED
1207301N/50	500mm	4,80W @ 24Vdc	natural white	60
1207301N/100	1000mm	9,60W @ 24Vdc	natural white	120
1207301N/200	2000mm	19,20W @ 24Vdc	natural white	240
1207301N/300	3000mm	28,80W @ 24Vdc	natural white	360

Code	Length	Watt & Volt	Light colour	LED
1207301B/50	500mm	4,80W @ 24Vdc	warm white	60
1207301B/100	1000mm	9,60W @ 24Vdc	warm white	120
1207301B/200	2000mm	19,20W @ 24Vdc	warm white	240
1207301B/300	3000mm	28,80W @ 24Vdc	warm white	360




FLEXYLED HE CR corners



Code	Length	Watt & Volt	Light colour	Model
1207701N	60x60mm	1,10W @ 24Vdc	natural white	left
1207701B	60x60mm	1,10W @ 24Vdc	warm white	left

Code	Length	Watt & Volt	Light colour	Model
1207601N	60x60mm	1,10W @ 24Vdc	natural white	right
1207601B	60x60mm	1,10W @ 24Vdc	warm white	right

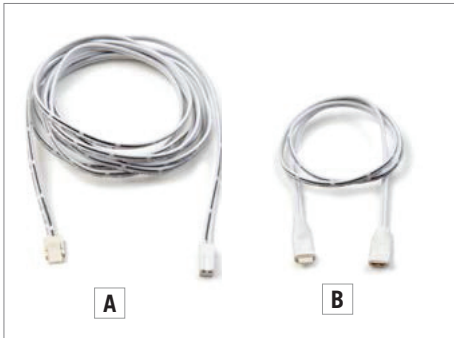

Cables for FLEXYLED HE CR

Rif.	Code	Length	Model
A	1149501	2000mm	power supply cable
B	1149601/50	500mm	interconnecting cable

SUGGESTED CONVERTERS

SL50/24D

LED converter with constant voltage 24Vdc 50W. Supplied with 2m power lead and Europlug. Dimensions (converter): L 185mm x L 60mm x H 31mm. It is possible to power up to 5 metres of FLEXYLED HE CR, even when connected in a continuous row.

code 0844101

SL75/24D

LED converter with constant voltage 24Vdc 75W. Supplied with 2m power lead and Europlug. Dimensions (converter): L 185mm x L 60mm x H 31mm. It is possible to power up to 7,5 metres FLEXYLED HE CR (max 6 metres connected in a continuous row).

code 0844201