



APEX H7 HI

Domus Line
design

LED profile in polycarbonate for recessed installation

Materials:

polycarbonate, thermoplastic polymers

Finishes:

white

Light source:

UHE LED module (280 LED/m)

Wiring:

2000mm



Application type:

wardrobe, kitchen larder

Installation:

recessed

APEX H7 is designed to be recessed installed flush with the panel in a through milled groove which is 9mm wide and 7mm deep. Its length can be adapted to your needs, with a minimum of 300mm and a maximum of 3000mm. **APEX H7** is recommended for vertical installation on the sides of wardrobes, and on kitchen larders.



Colour appearance natural white
Colour temperature 4000 K
Luminous efficiency 82 lm/W
CRI Ra ≥ 80

Colour appearance warm white
Colour temperature 3000 K
Luminous efficiency 82 lm/W
CRI Ra ≥ 80

* values referring to APEX H7 1200mm



APEX H7 HI
without switch



| Code | Model | Watt & Volt |
|-------------|-----------------|---------------|
| on request* | UHE (280 LED/m) | 10W/m @ 24Vdc |

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.


* Codes will be provided according to the length requested.

24Vdc




(N)

This drawing shows the profile's overall dimensions. See installation manual for more details.

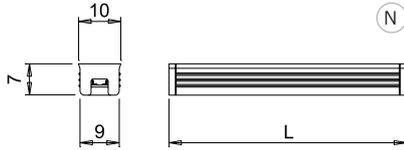

APEX H7 HI is designed for recessed installation in a blind or through milled groove which is 9mm wide and 7mm deep.

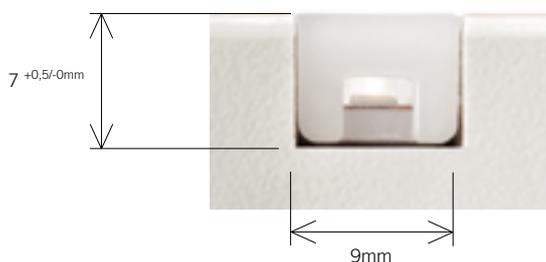

The specific **APEX H7 HI**'s shape allows the profile to be installed perfectly flush with the panel without emerging from the milled groove.

APEX H7 profile alone with relative accessories (screen and heads) for customisation also available. For details consult the **Flexyled collection catalogue** available also on www.domusline.com



For LED converters and accessories see page 76 or consult the **Domus Extra catalogue** also available on www.domusline.com.



¹ For UL-certified model codes, see the **American standard LED collection catalogue**, also available at www.domusline.com.

