


Pocket system for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Allows constructions with and without handle – the technology remains invisible


Technical specifications

- 6–25 kg (13 to 55 lbs.)
- 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
- 350–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")

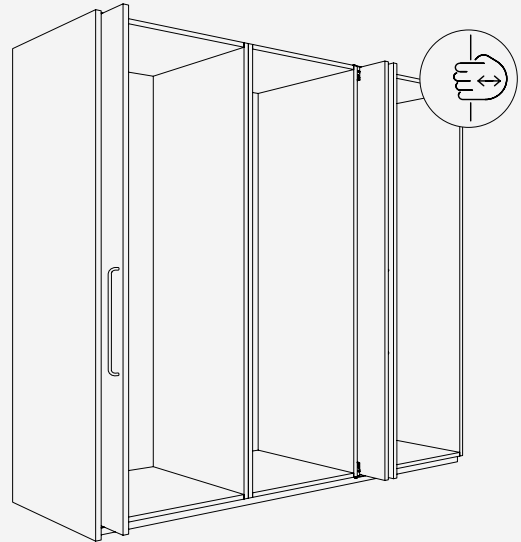



Installation examples

Door striking against the top and bottom cabinet sections

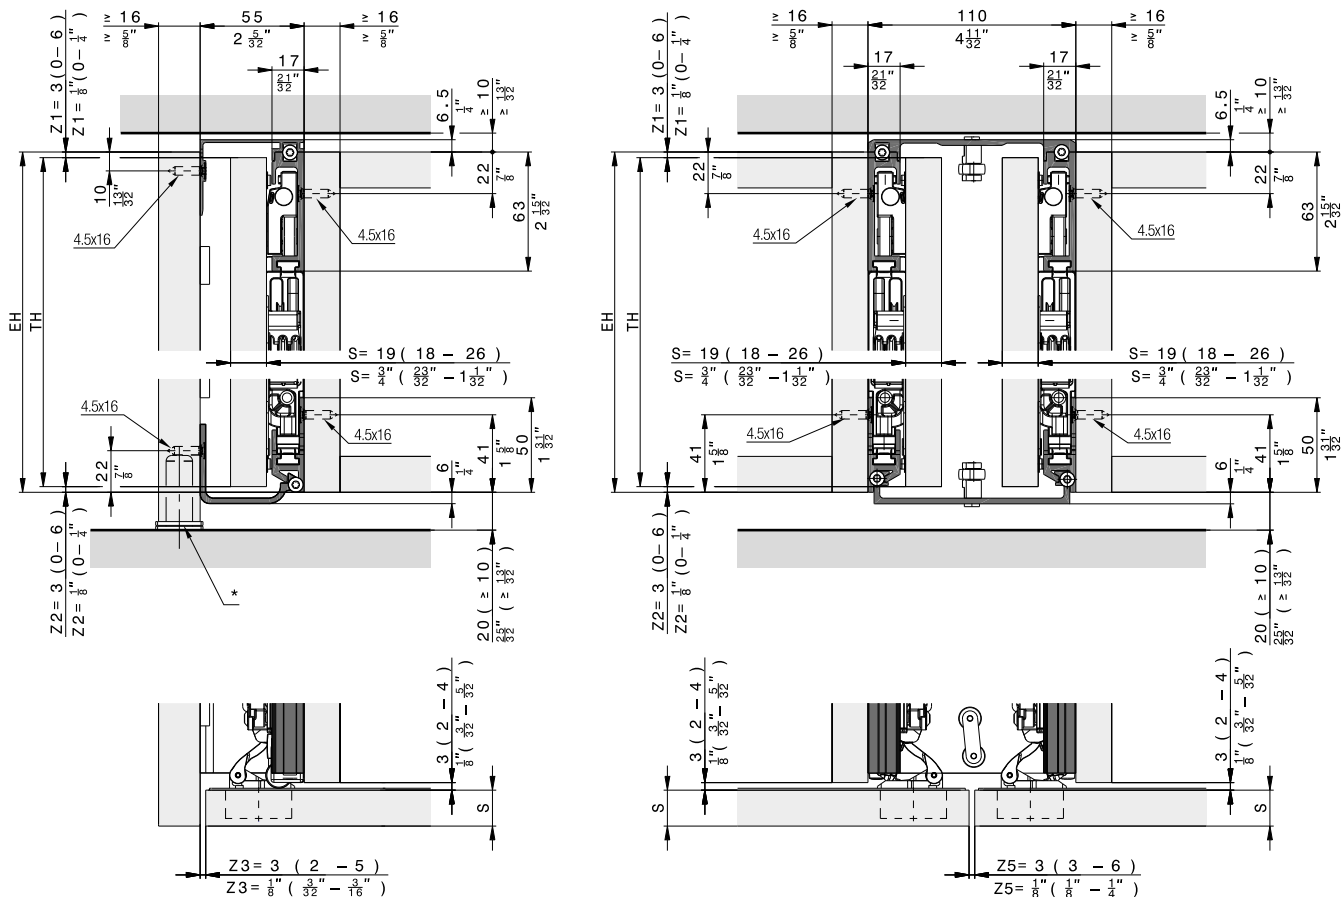

* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III V2 25 Pull, left

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, left, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30994
Hawa Concepta III V2 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Hawa Concepta III V2 25 Pull, right

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, right, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30995
Hawa Concepta III V2 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm									
		350	400	450	500	550	600	650	700	750	
Door height mm	2200	25	25	25	25	25	25	25	25	25	Maximum weights in kg
	2150	25	25	25	25	25	25	25	25	25	
	2100	25	25	25	25	25	25	25	25	25	
	2050	25	25	25	25	25	25	25	25	25	
	2000	25	25	25	25	25	25	25	25	24	
	1950	25	25	25	25	25	25	25	25	24	
	1900	25	25	25	25	25	25	25	24	23	
	1850	25	25	25	25	25	25	25	24	22	
	1800	25	25	25	25	25	25	24	23	22	
	1750	25	25	25	25	25	25	24	22	21	
	1700	25	25	25	25	25	25	23	22	20	
	1650	25	25	25	25	25	24	22	21	20	
	1600	25	25	25	25	25	23	21	20	19	
	1550	25	25	25	25	24	22	21	19	18	
	1500	25	25	25	25	23	21	20	19	18	
	1450	25	25	25	24	22	20	19	18	17	
	1400	25	25	25	23	21	20	18	17	16	
	1350	25	25	24	22	20	19	18	17	16	
	1300	25	25	23	21	19	18	17	16	15	
	1250	25	24	22	20	18	17	16	15	14	
	1200	25	23	21	19	18	16	15	14	14	
		Door width in mm									
		350	400	450	500	550	600	650	700	750	

		Door width in inch									
		1' 1 3/8"	1' 3 3/8"	1' 5 3/8"	1' 7 3/8"	1' 9 3/8"	1' 11 3/8"	2' 1 3/8"	2' 3 3/8"	2' 5 3/8"	
Door height in inch	7' 2 3/8"	55	55	55	55	55	55	55	55	55	Maximum weights in lbs.
	7' 3/8"	55	55	55	55	55	55	55	55	55	
	6' 10 3/8"	55	55	55	55	55	55	55	55	55	
	6' 8 3/8"	55	55	55	55	55	55	55	55	55	
	6' 6 3/8"	55	55	55	55	55	55	55	55	53	
	6' 4 3/8"	55	55	55	55	55	55	55	55	53	
	6' 2 3/8"	55	55	55	55	55	55	55	53	51	
	6' 3/8"	55	55	55	55	55	55	55	53	49	
	5' 10 3/8"	55	55	55	55	55	55	53	51	49	
	5' 8 3/8"	55	55	55	55	55	55	53	49	46	
	5' 6 3/8"	55	55	55	55	55	55	51	49	44	
	5' 4 3/8"	55	55	55	55	55	53	49	46	44	
	5' 3 3/8"	55	55	55	55	55	51	46	44	42	
	5' 1 3/8"	55	55	55	55	53	49	46	42	40	
	4' 11 3/8"	55	55	55	55	51	46	44	42	40	
	4' 9 3/8"	55	55	55	53	49	44	42	40	37	
	4' 7 3/8"	55	55	55	51	46	44	40	37	37	
	4' 5 3/8"	55	55	53	49	44	42	40	37	35	
	4' 3 3/8"	55	55	51	46	42	40	37	35	33	
	4' 1 3/8"	55	53	49	44	40	37	35	33	31	
	3' 11 3/8"	55	51	46	42	40	35	33	31	31	
		Door width in inch									
		1' 1 3/8"	1' 3 3/8"	1' 5 3/8"	1' 7 3/8"	1' 9 3/8"	1' 11 3/8"	2' 1 3/8"	2' 3 3/8"	2' 5 3/8"	

Hawa Configurator

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, left, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30994
Hawa Concepta III V2 25 Push/Pull, basic set, right, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30995


		30994	30995	No.
Set consisting of:				
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel	1	1	52616
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	52621
	Screw set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x 1/2"), steel, black, set of 3 pieces	2	2	53562
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		30805
	Running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (5/32"x5/8"), set of 16 pieces, incl. T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	30806
	Top running track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31060

Suitable slide-in set


	No.
Hawa Concepta III V2 25/35 Pull, slide-in set, left	31000
Hawa Concepta III V2 25/35 Pull, slide-in set, right	31001

		31000	31001	No.
Set consisting of:				
	Hawa Concepta III V2 25/35 Pull slide-in unit, left	1		52643
	Pull end stop bracket, steel, zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III V2 Pull set of cover caps, for left-hand stop, plastic, black	1		52650
	Hawa Concepta III V2 25/35 Pull slide-in unit, right		1	52642
	Hawa Concepta III V2 Pull set of cover caps, for right-hand stop, plastic, black		1	52651

Upright

	No.
 Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007
	Connector clips, exterior connection to cabinet, bottom, 2 pieces		53554

Guides

		No.
	Guide for two inset pivot sliding doors, aluminum	25680

Accessories

		No.
	Allen key, with handle, 3 mm (1/8'')	13164
	Allen key 4 mm (5/32''), length 160 mm (6 5/16'')	19931

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.079
Straightening fitting for doors 1215–1775 mm (3' 11 27/32"–5' 9 27/32''), aluminum, can be shortened for doors smaller than 1215 mm (3' 11 27/32''), set of 2 pieces	056.3192.073

Aluminum, anodized

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.080

Aluminum, black anodized

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.081
Straightening fitting for doors 1215–1775 mm (3' 11 27/32"–5' 9 27/32''), aluminum, black anodized, can be shortened for doors smaller than 1215 mm (3' 11 27/32''), set of 2 pieces	056.3192.076

Hawa Straightening fitting




Aluminum, untreated
(without cover caps)

Aluminum, anodized
(with cover caps)



Aluminum, black anodized
(with cover caps)



Further installation examples Composed cabinet

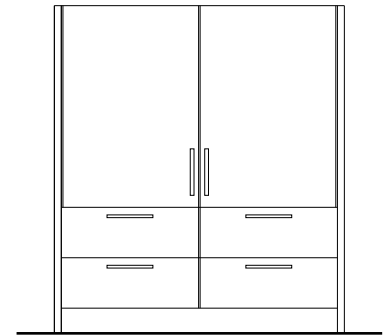
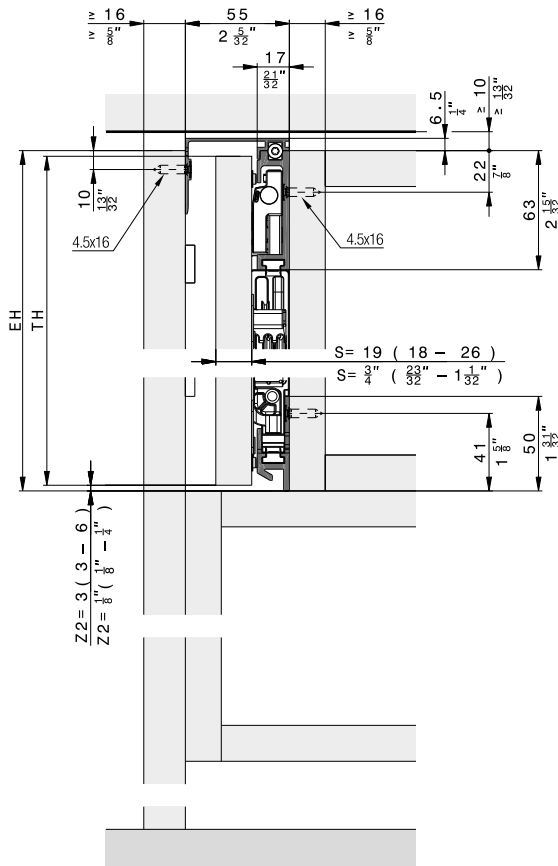


Cabinet without base panel

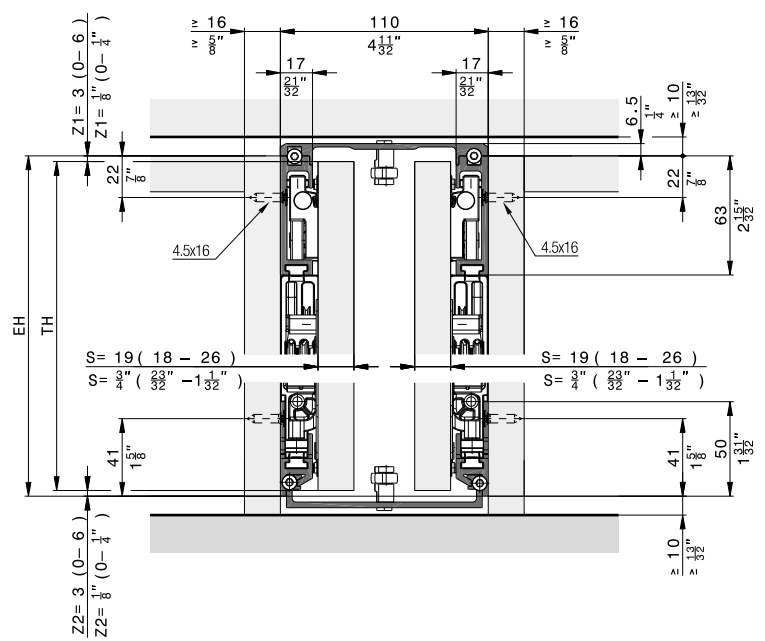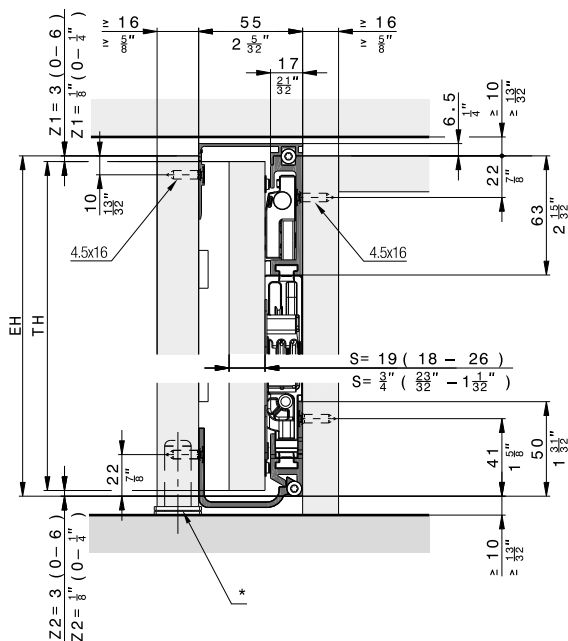


* Recommendation: Use adjustable foot

Inlaid doors

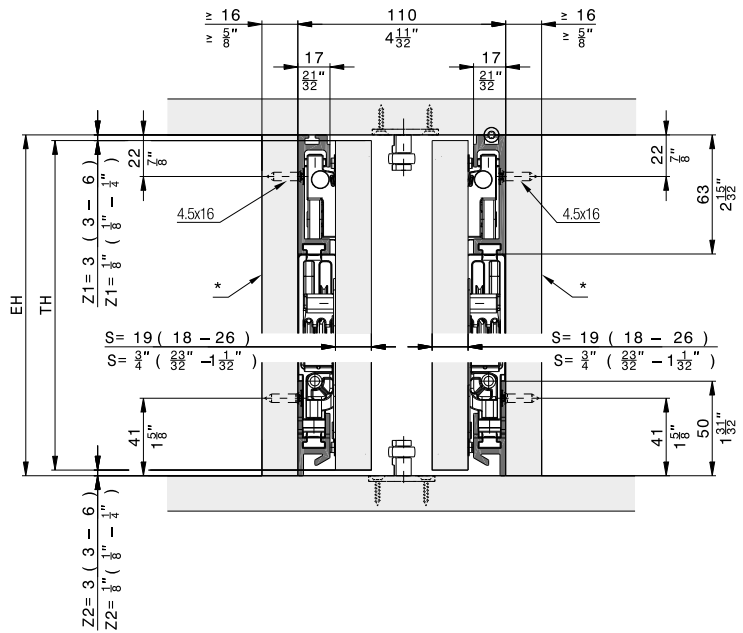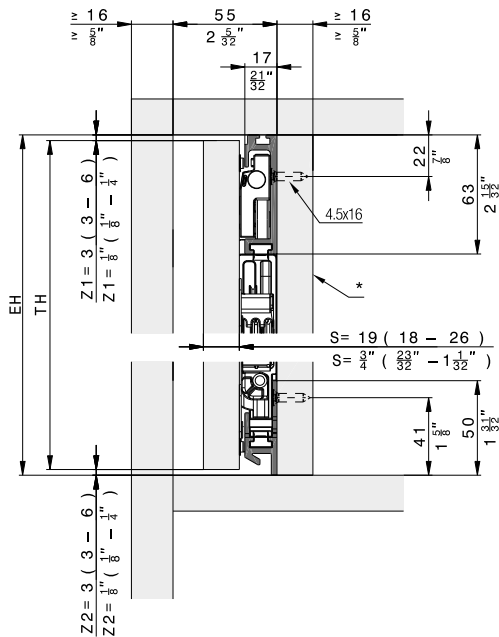


* removable

Floor-to-ceiling doors

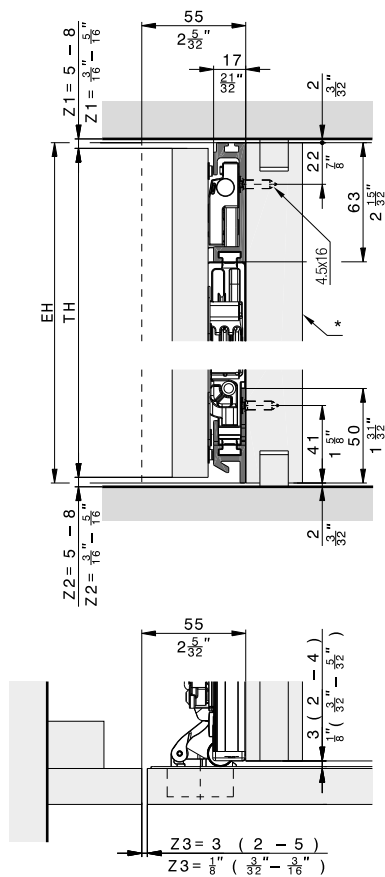

* removable


Hardware depth calculation

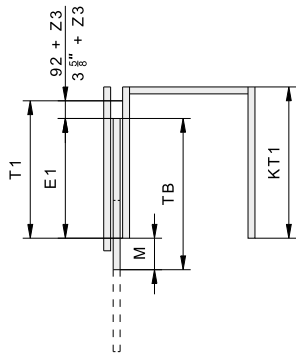


	mm	Inch
T1	≥ 414	≥ 1' 4 $\frac{5}{16}$ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 $\frac{5}{8}$ " + Z3 - M
E1	TB - M	TB - M
M	$\geq S+3$ $\leq TB-320$	$\geq S + \frac{1}{8}$ " $\leq TB - 1 \frac{19}{32}$ "

Door flush with outer face



Protruding door

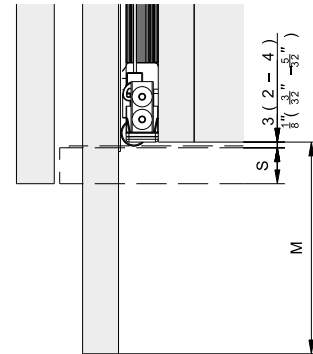

Instructions

Videos

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.