


Pocket system for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Allows constructions with and without handle – the technology remains invisible


Technical specifications

- 10–35 kg (22 to 77 lbs.)
- 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
- 350–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")

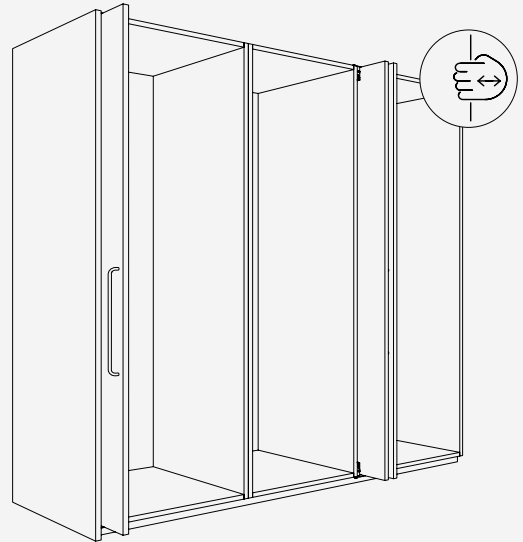



Installation examples

Door striking against the top and bottom cabinet sections

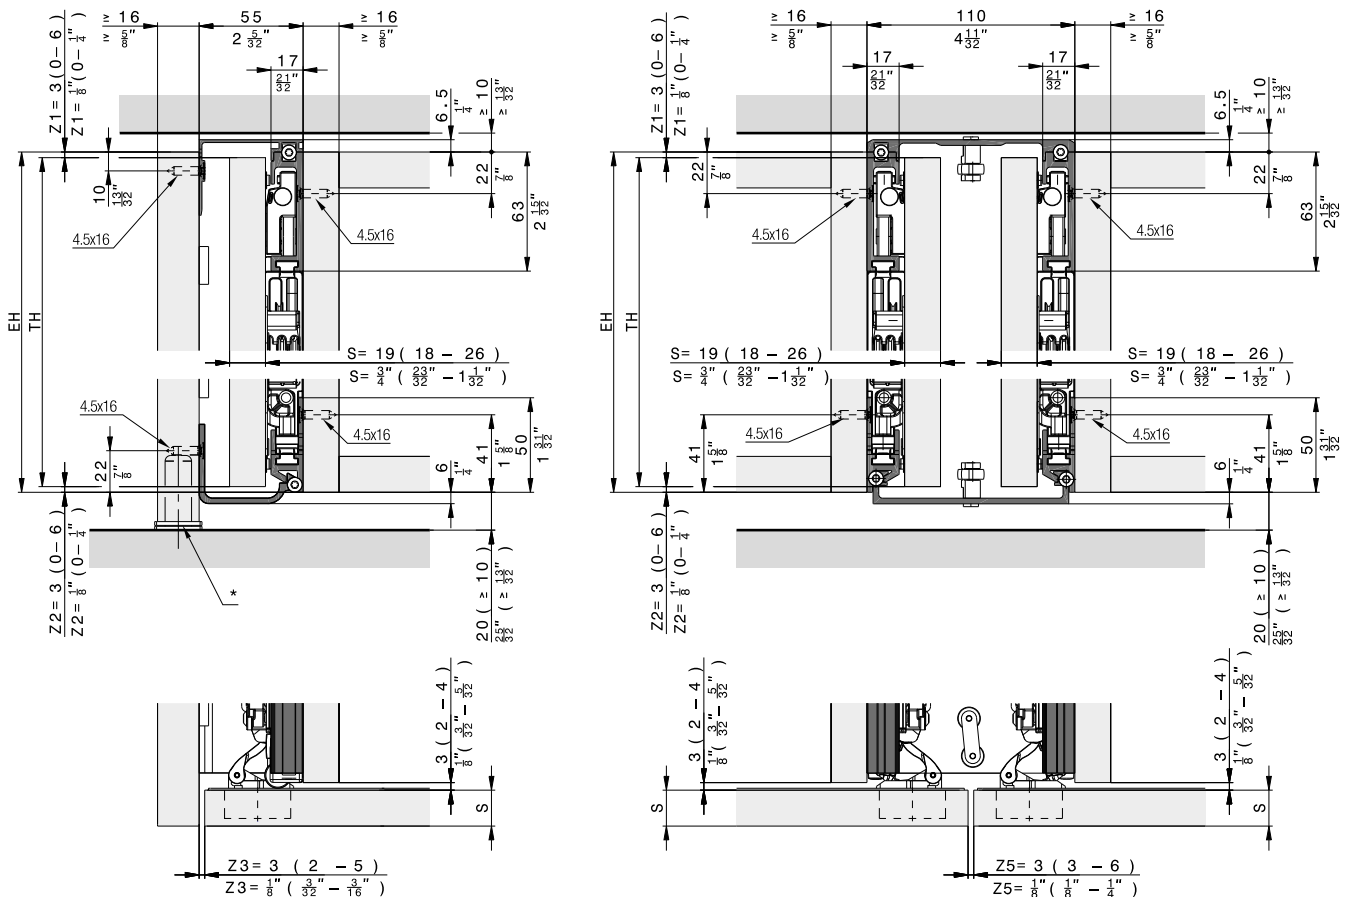

* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III V2 35 Pull, left

	No.
Hawa Concepta III V2 35 Push/Pull, basic set, left, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30996
Hawa Concepta III V2 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Hawa Concepta III V2 35 Pull, right

	No.
Hawa Concepta III V2 35 Push/Pull, basic set, right, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30997
Hawa Concepta III V2 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm								
		350	400	450	500	550	600	650	700	750
Door height mm	2200	25	25	25	25	25	25	25	25	25
	2150	25	25	25	25	25	25	25	25	25
	2100	25	25	25	25	25	25	25	25	25
	2050	25	25	25	25	25	25	25	25	25
	2000	25	25	25	25	25	25	25	25	24
	1950	25	25	25	25	25	25	25	25	24
	1900	25	25	25	25	25	25	25	24	23
	1850	25	25	25	25	25	25	25	24	22
	1800	25	25	25	25	25	25	24	23	22
	1750	25	25	25	25	25	25	24	22	21
	1700	25	25	25	25	25	25	23	22	20
	1650	25	25	25	25	25	24	22	21	20
	1600	25	25	25	25	25	23	21	20	19
	1550	25	25	25	25	24	22	21	19	18
	1500	25	25	25	25	23	21	20	19	18
	1450	25	25	25	24	22	20	19	18	17
Maximum weights in kg	1400	25	25	25	23	21	20	18	17	16
	1350	25	25	24	22	20	19	18	17	16
	1300	25	25	23	21	19	18	17	16	15
	1250	25	24	22	20	18	17	16	15	14
	1200	25	23	21	19	18	16	15	14	14
	Door weight in kg									

		Door width in inch								
		1' 1 1/8"	1' 3 3/8"	1' 5 3/8"	1' 7 3/8"	1' 9 3/8"	1' 11 3/8"	2' 1 3/8"	2' 3 3/8"	2' 5 3/8"
Door height in inch	7' 2 3/4"	55	55	55	55	55	55	55	55	55
	7' 3/4"	55	55	55	55	55	55	55	55	55
	6' 10 3/4"	55	55	55	55	55	55	55	55	55
	6' 8 3/4"	55	55	55	55	55	55	55	55	55
	6' 6 3/4"	55	55	55	55	55	55	55	55	53
	6' 4 3/4"	55	55	55	55	55	55	55	55	53
	6' 2 3/4"	55	55	55	55	55	55	55	53	51
	6' 3/4"	55	55	55	55	55	55	55	53	49
	5' 10 3/4"	55	55	55	55	55	55	53	51	49
	5' 8 3/4"	55	55	55	55	55	55	53	49	46
	5' 6 3/4"	55	55	55	55	55	55	51	49	44
	5' 4 3/4"	55	55	55	55	55	53	49	46	44
	5' 3"	55	55	55	55	55	51	46	44	42
	5' 1 3/4"	55	55	55	55	53	49	46	42	40
	4' 11 3/4"	55	55	55	55	51	46	44	42	40
	4' 9 3/4"	55	55	55	53	49	44	42	40	37
Maximum weights in lbs.	4' 7 3/4"	55	55	55	51	46	44	40	37	37
	4' 5 3/4"	55	55	53	49	44	42	40	37	35
	4' 3 3/4"	55	55	51	46	42	40	37	35	33
	4' 1 3/4"	55	53	49	44	40	37	35	33	31
	3' 11 3/4"	55	51	46	42	40	35	33	31	31
	Door weight in lbs.									

Hawa Configurator

List of individual parts, which are included in the sets


Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III V2 35 Push/Pull, basic set, left, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30996
Hawa Concepta III V2 35 Push/Pull, basic set, right, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30997


		30996	30997	No.
Set consisting of:				
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel	1	1	52616
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	52621
	Screw set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x 1/2"), steel, black, set of 3 pieces	2	2	53562
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		30805
	Running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (5/32"x5/8"), set of 16 pieces, incl. T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	30806
	Top running track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31060

Suitable slide-in set


	No.
Hawa Concepta III V2 25/35 Pull, slide-in set, left	31000
Hawa Concepta III V2 25/35 Pull, slide-in set, right	31001

		31000	31001	No.
Set consisting of:				
	Hawa Concepta III V2 25/35 Pull slide-in unit, left	1		52643
	Pull end stop bracket, steel, zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III V2 Pull set of cover caps, for left-hand stop, plastic, black	1		52650
	Hawa Concepta III V2 25/35 Pull slide-in unit, right		1	52642
	Hawa Concepta III V2 Pull set of cover caps, for right-hand stop, plastic, black		1	52651

Upright

	No.
 Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007
	Connector clips, exterior connection to cabinet, bottom, 2 pieces		53554

Guides

	No.
	25680

Accessories

	No.
	13164
	19931

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

	No.
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8''), aluminum, set of 2 pieces	056.3192.072
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.079

Aluminum, anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32''), aluminum, anodized, set of 2 pieces	056.3192.071
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8''), aluminum, anodized, set of 2 pieces	056.3192.082
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.080

Aluminum, black anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32''), aluminum, black anodized, incl. cover caps, set of 2 pieces	056.3192.074
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8''), aluminum, black anodized, set of 2 pieces	056.3192.075
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.081

Hawa Straightening fitting

Aluminum, untreated
(without cover caps)






Aluminum, anodized
(with cover caps)





Aluminum, black anodized
(with cover caps)



Composed cabinet

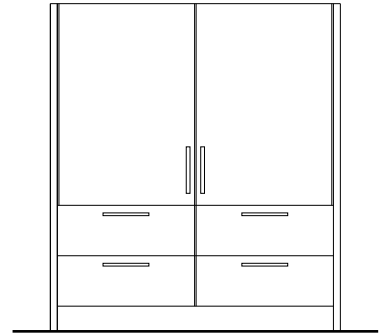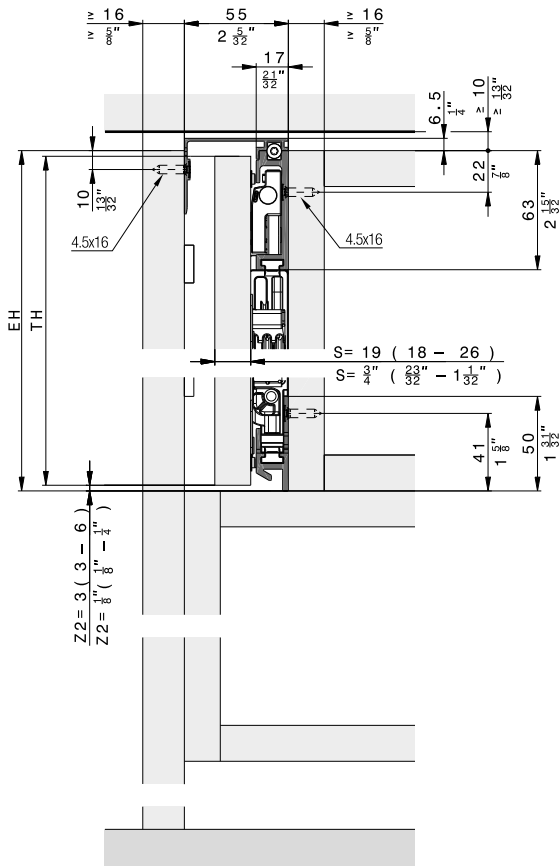


Cabinet without base panel

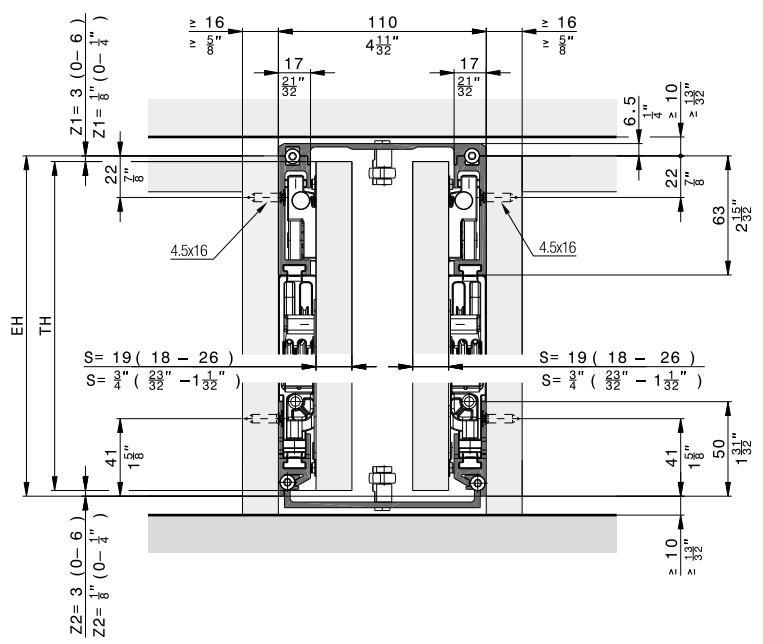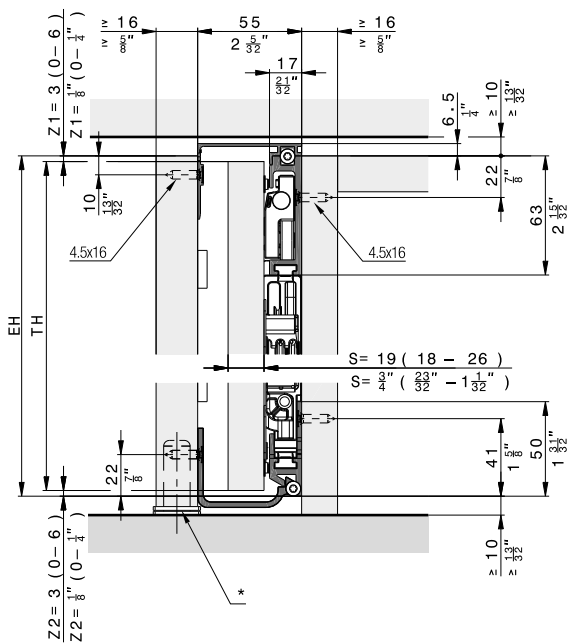


* Recommendation: Use adjustable foot


Inlaid doors

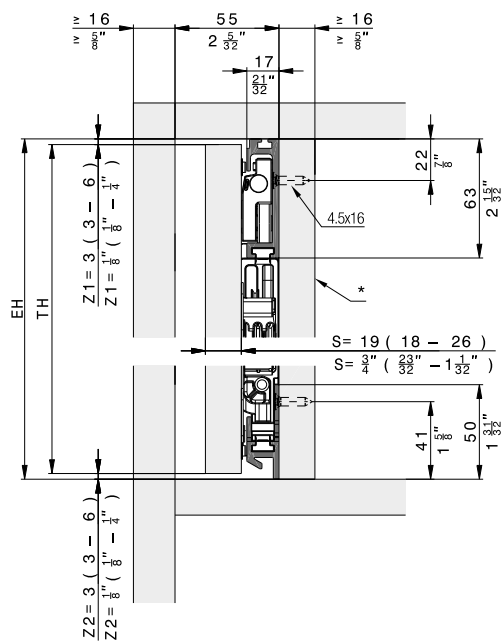

* removable

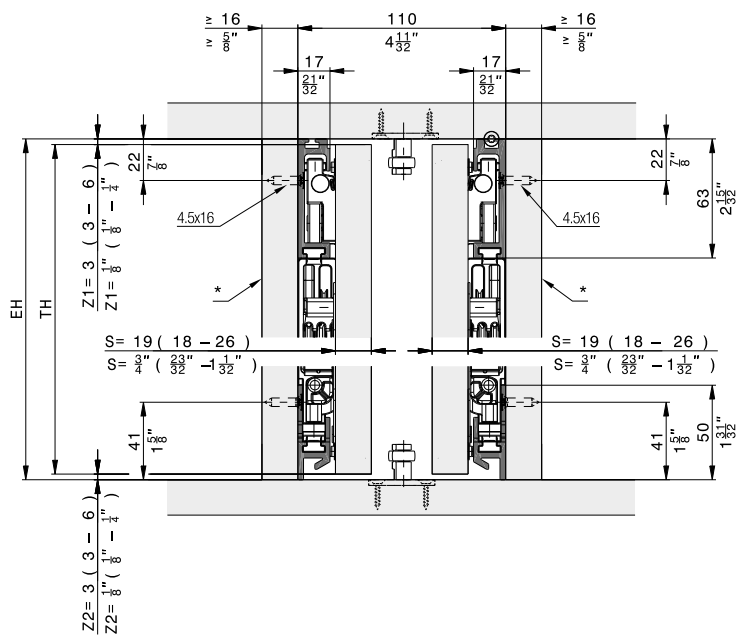


Floor-to-ceiling doors

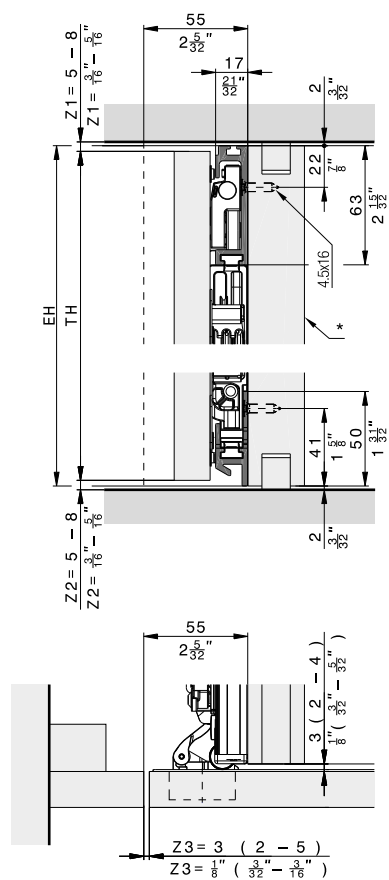

* removable


Hardware depth calculation

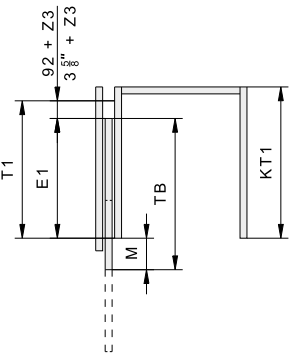


	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

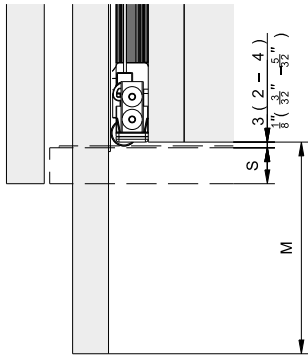

Instructions

Videos

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.