


**Pocket system for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.**

### Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Cabinet designs without handle – the technology remains invisible


### Technical specifications

- 10–35 kg (22 to 77 lbs.)
- 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
- 350–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")

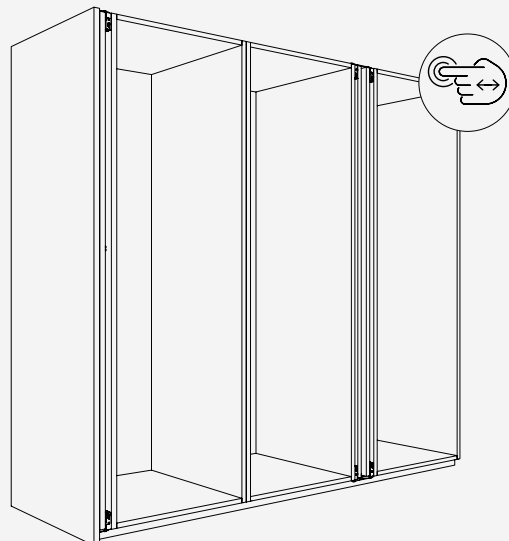



### Installation examples

#### Door striking against the top and bottom cabinet sections

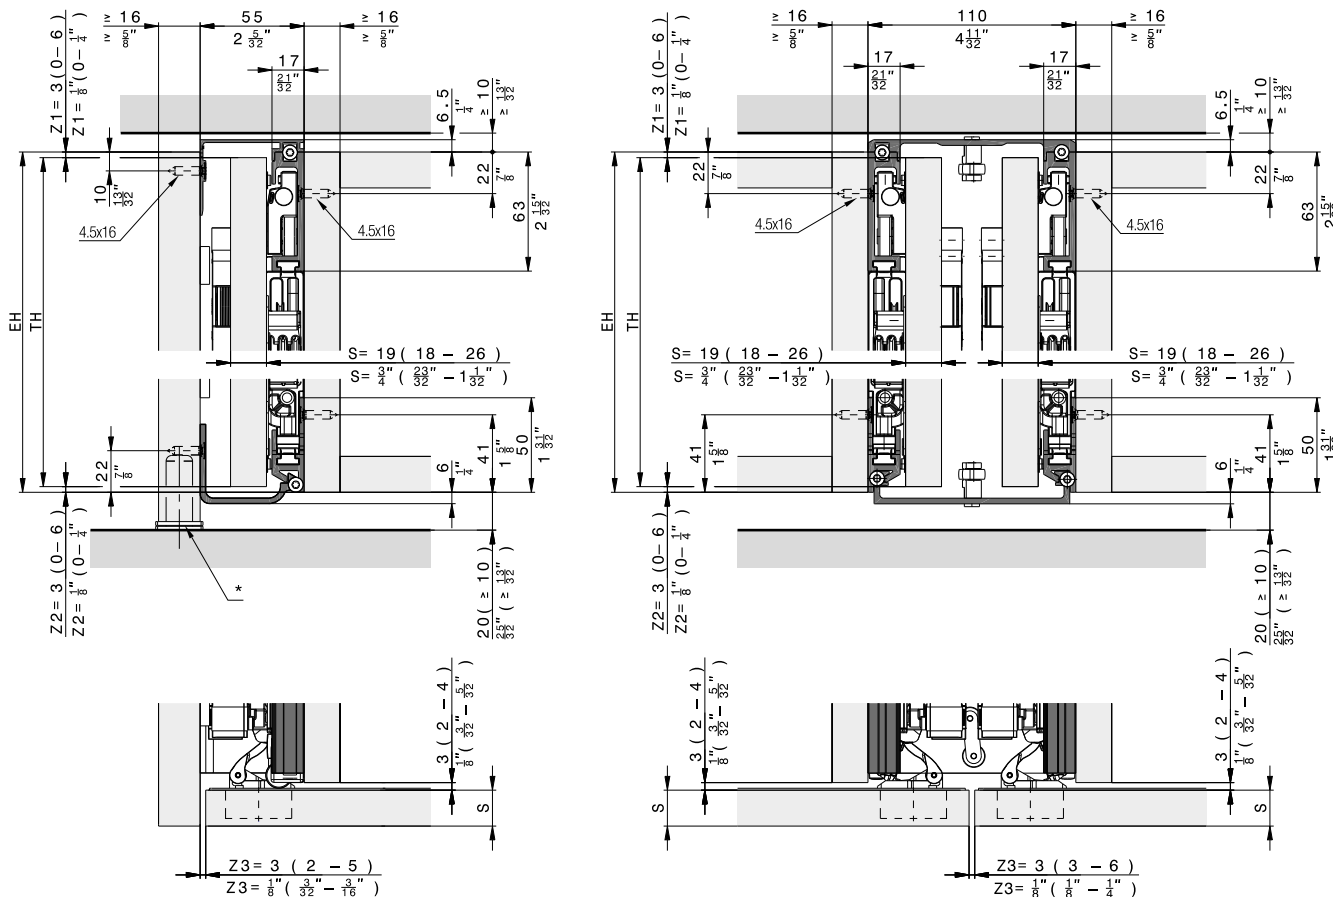

\* Recommendation: Use adjustable foot

### Components required for one cabinet



### Hawa Concepta III V2 35 Push, left

|                                                                                                                       | No.   |
|-----------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III V2 35 Push/Pull, basic set, left, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")                | 30996 |
| Hawa Concepta III V2 25/35 Push, slide-in set, left                                                                   | 30998 |
| Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32") | 30771 |

### Hawa Concepta III V2 35 Push, right

|                                                                                                                       | No.   |
|-----------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III V2 35 Push/Pull, basic set, right, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")               | 30997 |
| Hawa Concepta III V2 25/35 Push, slide-in set, right                                                                  | 30999 |
| Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32") | 30771 |

### Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

|                |      | Door width in mm      |     |     |     |     |     |     |     |     |
|----------------|------|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|
|                |      | 350                   | 400 | 450 | 500 | 550 | 600 | 650 | 700 | 750 |
| Door height mm | 2200 | 25                    | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  |
|                | 2150 | 25                    | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  |
|                | 2100 | 25                    | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  |
|                | 2050 | 25                    | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 25  |
|                | 2000 | 25                    | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 24  |
|                | 1950 | 25                    | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 24  |
|                | 1900 | 25                    | 25  | 25  | 25  | 25  | 25  | 25  | 24  | 23  |
|                | 1850 | 25                    | 25  | 25  | 25  | 25  | 25  | 25  | 24  | 22  |
|                | 1800 | 25                    | 25  | 25  | 25  | 25  | 25  | 24  | 23  | 22  |
|                | 1750 | 25                    | 25  | 25  | 25  | 25  | 25  | 24  | 22  | 21  |
|                | 1700 | 25                    | 25  | 25  | 25  | 25  | 25  | 23  | 22  | 20  |
|                | 1650 | 25                    | 25  | 25  | 25  | 25  | 24  | 22  | 21  | 20  |
|                | 1600 | 25                    | 25  | 25  | 25  | 25  | 23  | 21  | 20  | 19  |
|                | 1550 | 25                    | 25  | 25  | 25  | 24  | 22  | 21  | 19  | 18  |
|                | 1500 | 25                    | 25  | 25  | 25  | 23  | 21  | 20  | 19  | 18  |
| Door height mm | 1450 | 25                    | 25  | 25  | 24  | 22  | 20  | 19  | 18  | 17  |
|                | 1400 | 25                    | 25  | 25  | 23  | 21  | 20  | 18  | 17  | 16  |
|                | 1350 | 25                    | 25  | 24  | 22  | 20  | 19  | 18  | 17  | 16  |
|                | 1300 | 25                    | 25  | 23  | 21  | 19  | 18  | 17  | 16  | 15  |
|                | 1250 | 25                    | 24  | 22  | 20  | 18  | 17  | 16  | 15  | 14  |
|                | 1200 | 25                    | 23  | 21  | 19  | 18  | 16  | 15  | 14  | 14  |
|                |      | Door width in mm      |     |     |     |     |     |     |     |     |
|                |      | Door weight in kg     |     |     |     |     |     |     |     |     |
|                |      | Maximum weights in kg |     |     |     |     |     |     |     |     |

|                     |            | Door width in inch      |           |           |           |           |            |           |           |           |
|---------------------|------------|-------------------------|-----------|-----------|-----------|-----------|------------|-----------|-----------|-----------|
|                     |            | 1' 1 1/8"               | 1' 3 1/8" | 1' 5 1/8" | 1' 7 1/8" | 1' 9 1/8" | 1' 11 1/8" | 2' 1 1/8" | 2' 3 1/8" | 2' 5 1/8" |
| Door height in inch | 7' 2 1/8"  | 55                      | 55        | 55        | 55        | 55        | 55         | 55        | 55        | 55        |
|                     | 7' 1/8"    | 55                      | 55        | 55        | 55        | 55        | 55         | 55        | 55        | 55        |
|                     | 6' 10 1/8" | 55                      | 55        | 55        | 55        | 55        | 55         | 55        | 55        | 55        |
|                     | 6' 8 1/8"  | 55                      | 55        | 55        | 55        | 55        | 55         | 55        | 55        | 55        |
|                     | 6' 6 1/8"  | 55                      | 55        | 55        | 55        | 55        | 55         | 55        | 55        | 53        |
|                     | 6' 4 1/8"  | 55                      | 55        | 55        | 55        | 55        | 55         | 55        | 55        | 53        |
|                     | 6' 2 1/8"  | 55                      | 55        | 55        | 55        | 55        | 55         | 55        | 53        | 51        |
|                     | 6' 1/8"    | 55                      | 55        | 55        | 55        | 55        | 55         | 55        | 53        | 49        |
|                     | 5' 10 1/8" | 55                      | 55        | 55        | 55        | 55        | 55         | 53        | 51        | 49        |
|                     | 5' 8 1/8"  | 55                      | 55        | 55        | 55        | 55        | 55         | 53        | 49        | 46        |
|                     | 5' 6 1/8"  | 55                      | 55        | 55        | 55        | 55        | 55         | 51        | 49        | 44        |
|                     | 5' 4 1/8"  | 55                      | 55        | 55        | 55        | 55        | 53         | 49        | 46        | 44        |
|                     | 5' 3 1/8"  | 55                      | 55        | 55        | 55        | 55        | 51         | 46        | 44        | 42        |
|                     | 5' 1 1/8"  | 55                      | 55        | 55        | 55        | 53        | 49         | 46        | 42        | 40        |
|                     | 4' 11 1/8" | 55                      | 55        | 55        | 55        | 51        | 46         | 44        | 42        | 40        |
| Door height in inch | 4' 9 1/8"  | 55                      | 55        | 55        | 53        | 49        | 44         | 42        | 40        | 37        |
|                     | 4' 7 1/8"  | 55                      | 55        | 55        | 51        | 46        | 44         | 40        | 37        | 37        |
|                     | 4' 5 1/8"  | 55                      | 55        | 53        | 49        | 44        | 42         | 40        | 37        | 35        |
|                     | 4' 3 1/8"  | 55                      | 55        | 51        | 46        | 42        | 40         | 37        | 35        | 33        |
|                     | 4' 1 1/8"  | 55                      | 53        | 49        | 44        | 40        | 37         | 35        | 33        | 31        |
|                     | 3' 11 1/8" | 55                      | 51        | 46        | 42        | 40        | 35         | 33        | 31        | 31        |
|                     |            | Door width in inch      |           |           |           |           |            |           |           |           |
|                     |            | Door weight in lbs.     |           |           |           |           |            |           |           |           |
|                     |            | Maximum weights in lbs. |           |           |           |           |            |           |           |           |


### Hawa Configurator

## List of individual parts, which are included in the sets

### Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

|                                                                                                         | No.   |
|---------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III V2 35 Push/Pull, basic set, left, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")  | 30996 |
| Hawa Concepta III V2 35 Push/Pull, basic set, right, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16") | 30997 |

### Set consisting of:

|                                                                                     |                                                                                                       | 30996 | 30997 | No.   |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------|-------|-------|
|    | Slot nuts for hinge attachment, plastic, black                                                        | 4     | 4     | 30686 |
|    | Mounting plate for hinge with height adjustment, steel                                                | 1     | 1     | 52616 |
|   | Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated                 | 4     | 4     | 52621 |
|  | Screw set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers                    | 1     | 1     | 30811 |
|  | Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")       | 2     | 2     | 30983 |
|  | Euro screw, 6x13 mm (1/4"x 1/2"), steel, black, set of 3 pieces                                       | 2     | 2     | 53562 |
|  | Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")                                   | 1     |       | 30805 |
|  | Running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")                                    | 1     |       | 31059 |
|  | Countersunk head screw for running track adapter, 4.5x16 mm (5/32"x5/8"), set of 16 pieces, incl. T20 | 1     | 1     | 31585 |
|  | Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")                                  |       | 1     | 30806 |
|  | Top running track right, aluminum, anodized, L= 820 mm (2' 8 9/32")                                   |       | 1     | 31060 |

### Suitable slide-in set


|                                                      | No.   |
|------------------------------------------------------|-------|
| Hawa Concepta III V2 25/35 Push, slide-in set, left  | 30998 |
| Hawa Concepta III V2 25/35 Push, slide-in set, right | 30999 |

|                                                                                     |                                                                                  | 30998 | 30999 | No.   |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-------|-------|-------|
|    | Hawa Concepta III V2 25/35 Push slide-in unit, left                              | 1     |       | 52645 |
|    | End stop bracket for push ejector, steel, zinc-plated                            | 1     | 1     | 52559 |
|    | Push ejector, plastic, black                                                     | 1     | 1     | 52454 |
|  | Push-to-open with adapter plate, plastic, black                                  | 1     | 1     | 30838 |
|  | Hawa Concepta III V2 Push set of cover caps, for left-hand stop, plastic, black  | 1     |       | 52648 |
|  | Hawa Concepta III V2 25/35 Push slide-in unit, right                             |       | 1     | 52644 |
|  | Hawa Concepta III V2 Push set of cover caps, for right-hand stop, plastic, black |       | 1     | 52649 |

### Upright

|                                                                                     |                                                                                                                       | No.   |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------|
|  | Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32") | 30771 |

## Cabinet connecting parts

|                                                                                     |                                                                                                                | mm<br>(inch)          | No.   |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------|-------|
|    | Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom                                 | 560<br>(1' 10 1/16'') | 31005 |
|    | Connector set 55 mm (2 5/32''), exterior connection to cabinet, top                                            | 560<br>(1' 10 1/16'') | 31430 |
|    | Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top                                            | 500<br>(1' 7 11/16'') | 31006 |
|    | Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom                                         | 500<br>(1' 7 11/16'') | 31246 |
|   | Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth) | 26<br>(1 1/32'')      | 31007 |
|  | Connector clips, exterior connection to cabinet, bottom, 2 pieces                                              |                       | 53554 |

## Guides

|                                                                                     | No.   |
|-------------------------------------------------------------------------------------|-------|
|  | 25680 |

## Accessories

|                                                                                     | No.   |
|-------------------------------------------------------------------------------------|-------|
|  | 13164 |
|  | 19931 |

## Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.  
www.halemeier.de

## Straightening fitting

→ Details under accessories from page 327

### Aluminum, untreated

|                                                                                                                                                                   | No.          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8''), aluminum, set of 2 pieces                                                                   | 056.3192.072 |
| Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces | 056.3192.079 |

### Aluminum, anodized

|                                                                                                                                                                             | No.          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32''), aluminum, anodized, set of 2 pieces                                                                  | 056.3192.071 |
| Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8''), aluminum, anodized, set of 2 pieces                                                                   | 056.3192.082 |
| Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces | 056.3192.080 |

### Aluminum, black anodized

|                                                                                                                                                                                   | No.          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32''), aluminum, black anodized, incl. cover caps, set of 2 pieces                                                | 056.3192.074 |
| Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8''), aluminum, black anodized, set of 2 pieces                                                                   | 056.3192.075 |
| Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces | 056.3192.081 |

## Hawa Straightening fitting

Aluminum, untreated  
(without cover caps)




Aluminum, anodized  
(with cover caps)

Aluminum, black anodized  
(with cover caps)





## Further installation examples

### Composed cabinet

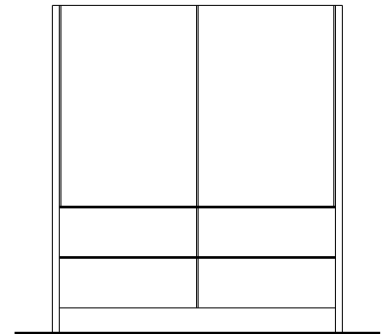
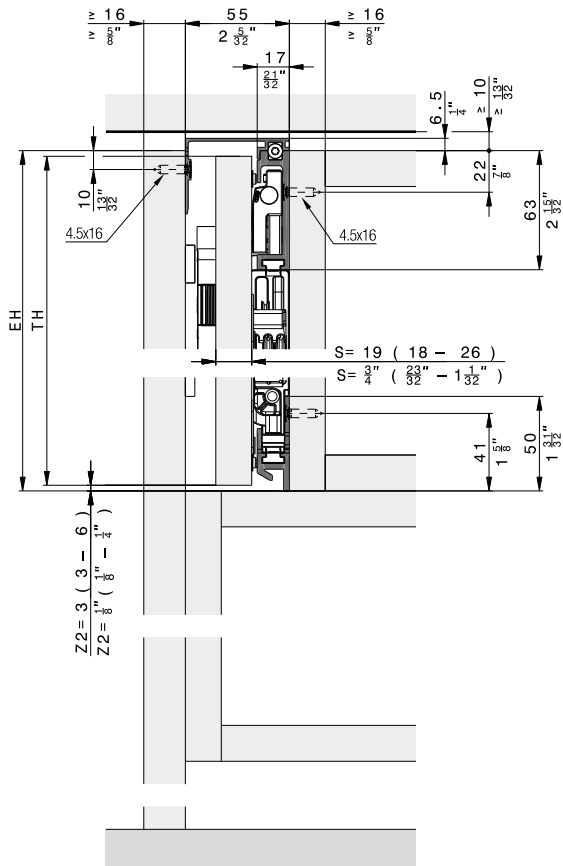


### Cabinet without base panel

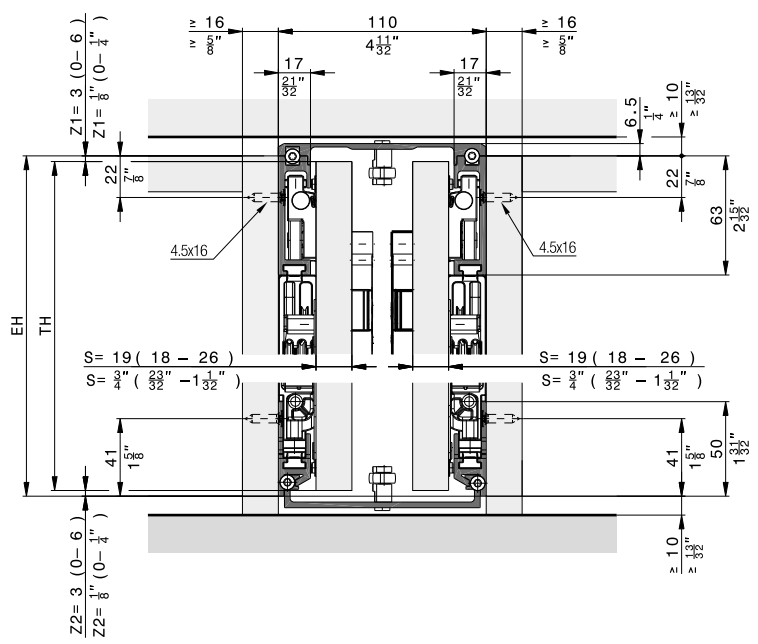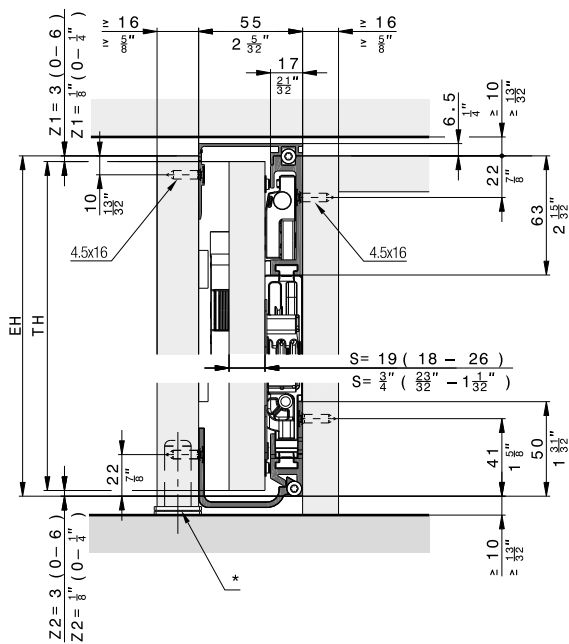


\* Recommendation: Use adjustable foot

### Inlaid doors

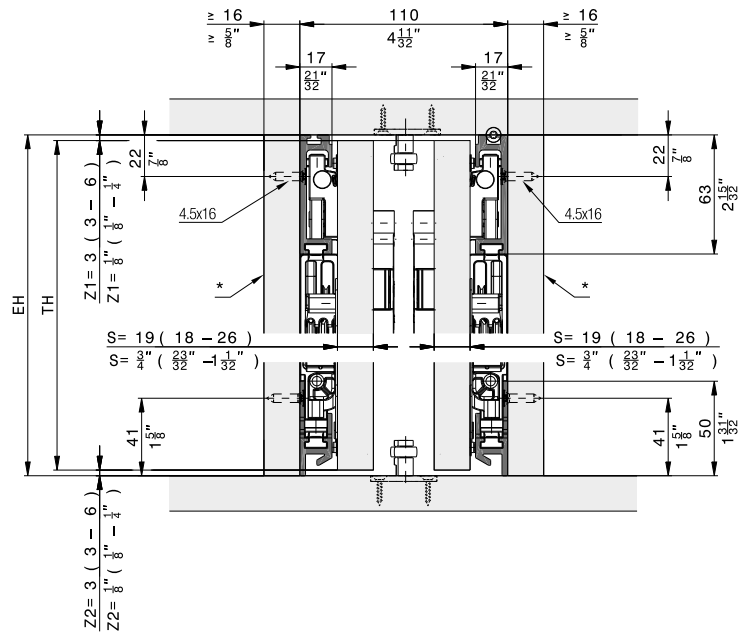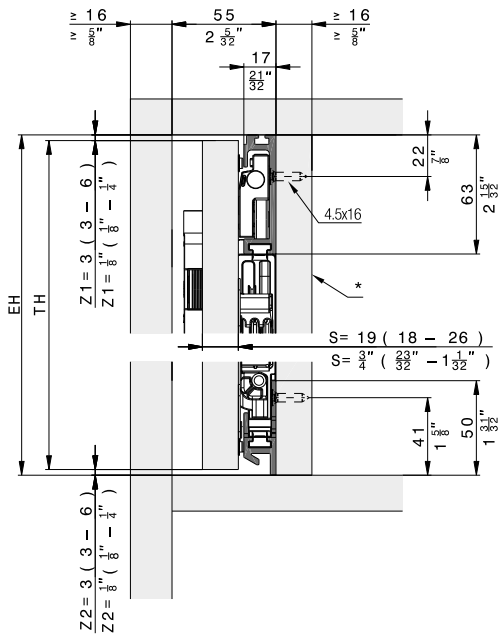


\* removable

### Floor-to-ceiling doors

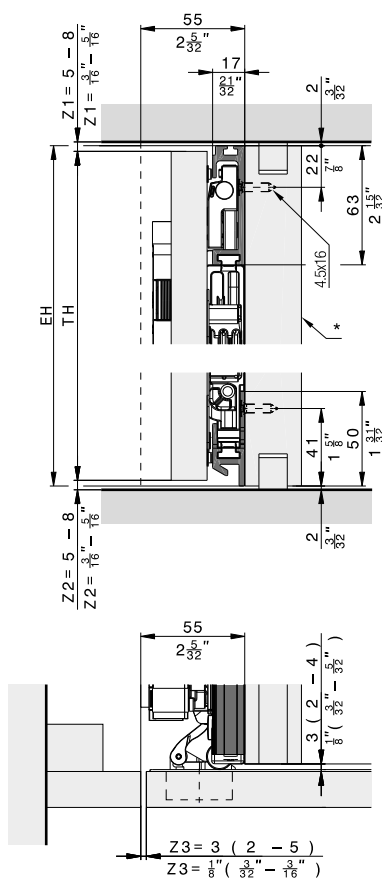

\* removable


## Hardware depth calculation

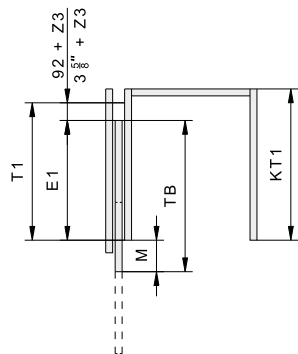


|    | mm    | Inch                                  |
|----|-------|---------------------------------------|
| T1 | ≥ 414 | ≥ 1' 4 <sup>5</sup> / <sub>16</sub> " |

|    | mm                    | Inch                                                                            |
|----|-----------------------|---------------------------------------------------------------------------------|
| T1 | TB + 92 + Z3 - M      | TB + 3 <sup>5</sup> / <sub>16</sub> " + Z3 - M                                  |
| E1 | TB - M                | TB - M                                                                          |
| M  | ≥ S + 3<br>≤ TB - 320 | ≥ S + <sup>1</sup> / <sub>8</sub> "<br>≤ TB - 1 <sup>19</sup> / <sub>32</sub> " |

Door flush with outer face



Protruding door

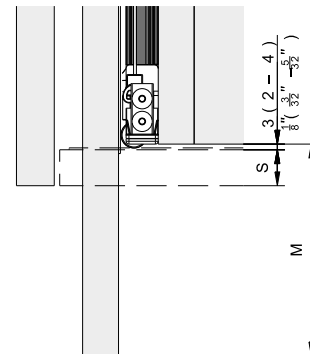

## Instructions

## Videos

## Accessories

– Straightening fitting from page 327

## Planning/execution

Configure with just a few clicks at [www.hawa.com/configurator](http://www.hawa.com/configurator)

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).