


D-POWER-1 30/12R



Code	F0125000005	12Vdc	Micro 12
------	-------------	-------	----------

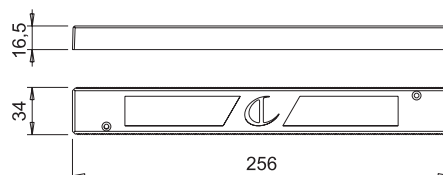

Rated voltage	220-240 VAC
Frequency	50/60 Hz
Output voltage	12 VDC
Pcg (Maximum output power)	30W
Full-load efficiency	85%
Pno (No-load power)	0,5W
Psb (Stand by power)	n.a.
Pnet (Network stand by power)	n.a.
Ta (Operation temperature)	-20... +45 °C
Tc (Enclosure temperature)	85 °C max
Dimension L x B x H	256 x 34 x 16,5 mm
Net weight	106 g



Features

- IP20 independent electronic power supply for LED lighting fixtures
- Class II protection against electric shock from direct and indirect contact.
- 2000 mm power cord with UE two-pole plug.
- 500 mm output cable and 12 VDC max. 3 A connection system with 9 female Micro12 connectors.
- Protections:
 - short circuit and over temperature
 - against over mains voltage
 - against over load
- Not dimmable on the primary.
- Internal use.
- EU 2019/2020 (Ecodesign) regulation compliant.