


FLEXYLED SE H4-24

Domus Line design

Recessed LED profile in silicone


Materials:

silicone, thermoplastic polymers Finishes: white Light source: SHE LED module (180 LED/m) Wiring: 2000mm Application type: universal Installation: recessed **FLEXYLED SE H4-24** is a 24Vdc flexible linear LED profile developed by implementing a new extrusion technology of diffusing silicone materials. FLEXYLED SE H4-24 is specifically designed for recessed installation in grooves with a width of just 4 mm and a depth of 8 mm flushed with the panel. Available in four pre-wired modules (100, 200, 250 and 300 centimetres), it can be divided every 33 mm.

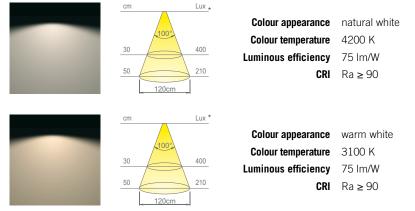

* values referring to FLEXYLED SE H4 24 1000mm





FLEXYLED SE H4-24	CE	EAE	$\langle p \rangle$	\bigcirc
-------------------	----	-----	---------------------	------------

180 LED/m LED module - with double power cable

Code	Length	Watt & Volt
1378601_*/100	1000mm	9,6W @ 24Vdc
1378601_*/200	2000mm	19,2W @ 24Vdc
1378601_*/250	2500mm	24W @ 24Vdc
1378601_*/300	3000mm	28,8W @ 24Vdc

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.




Code Light colour*	
Ν	natural white
В	warm white

$\overline{}$	\sim	Ì

EXTREME FLEXIBILITY


Thanks to the flexibility of the strip led, FLEXYLED SE H4-24 can be used to install the luminaire in a straight, curved or circular groove or in any other configuration.





MODULARITY

FLEXYLED SE H4-24 can be divided at 33,33mm intervals (6 LEDs).



PRESS-ON INSTALLATION

The FLEXYLED SE H4-24 does not require glue or other kinds of adhesive, as it is made from soft silicone that is simply pressed into the groove. It is ideal for the sides of wardrobes.

TECHNICAL DATA

Power	see table
Power supply	24Vdc
LEDs/metre	180
Divisibility	3,3cm (6 LED)
Cable	2000mm
Protection	IP20
3M [©] adeshive	no

For LED converters and accessories see page 76 or consult the **Domus Extra catalogue** also available on www.domusline.com.





FLEXYLED SE H4-24