



FLEXYLED SE H4

Domus Line
design

Silicone LED profile for recessed installation

Materials:

silicone

Finishes:

white

Light source:

HE LED module (120 LED/m)

Wiring:

2000mm


Application type:

wardrobe, kitchen larder


Installation:

recessed

FLEXYLED SE H4 is a side-emitting flexible LED profile. Created using new silicone extrusion technology, it is designed for recessed installation in a groove only 4mm wide and 10mm deep flush with the panel. Available in five precabled modules: 100, 150, 200, 250, and 300cm.



Colour appearance natural white
Colour temperature 4000 K
Luminous efficiency 70 lm/W
CRI Ra ≥ 80



Colour appearance warm white
Colour temperature 3100 K
Luminous efficiency 70 lm/W
CRI Ra ≥ 80

* values referring to FLEXYLED SE H4 1000mm



FLEXYLED SE H4
120 LED/m modules




Code	Length	Watt & Volt	Light colour	Finish
1281501N/100	1000mm	12W @ 12Vdc	natural white	white
1281501N/150	1500mm	18W @ 12Vdc	natural white	white
1281501N/200	2000mm	22W @ 12Vdc	natural white	white
1281501N/250	2500mm	27W @ 12Vdc	natural white	white
1281501N/300	3000mm	30W @ 12Vdc	natural white	white
1281501B/100	1000mm	12W @ 12Vdc	warm white	white
1281501B/150	1500mm	18W @ 12Vdc	warm white	white
1281501B/200	2000mm	22W @ 12Vdc	warm white	white
1281501B/250	2500mm	27W @ 12Vdc	warm white	white
1281501B/300	3000mm	30W @ 12Vdc	warm white	white

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.



FLEXYLED SE H4
120 LED/m modules - with double power cable




Code	Length	Watt & Volt	Light colour	Finish
1323801N/100	1000mm	12W @ 12Vdc	natural white	white
1323801N/200	2000mm	22W @ 12Vdc	natural white	white
1323801N/250	2500mm	27W @ 12Vdc	natural white	white
1323801N/300	3000mm	30W @ 12Vdc	natural white	white
1323801B/100	1000mm	12W @ 12Vdc	warm white	white
1323801B/200	2000mm	22W @ 12Vdc	warm white	white
1323801B/250	2500mm	27W @ 12Vdc	warm white	white
1323801B/300	3000mm	30W @ 12Vdc	warm white	white


CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



(N) This drawing shows the profile's overall dimensions. See installation manual for more details.

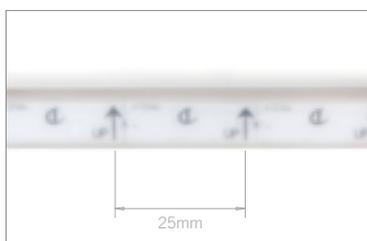

MODULARITY
FLEXYLED SE H4 can be divided at 25mm intervals.

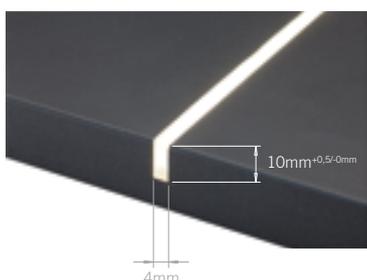

PRESS-ON INSTALLATION
The FLEXYLED SE H4 does not require glue or other kinds of adhesive, as it is made from soft silicone that is simply pressed into the groove. It is ideal for the sides of wardrobes.

For LED converters and accessories see page 76 or consult the **Domus Extra catalogue** also available on www.domusline.com.



¹ For UL-certified model codes, see the **American standard LED collection catalogue**, also available at www.domusline.com.

