

**Easy to implement – convenient to use.**

**Hardware system for pivot sliding cabinet doors weighing up to 25, 30, 40 and 50 kg (55/66/88/110 lbs.)**

## Description

The HAWA-Concepta 25/30/40/50 slides doors alongside cabinet bodies or into wall recesses. Room-high designs and walk-in cabinets are easy and efficient to implement. The well-thought-out concept has omitted a bottom guide channel and offers optimum flexible room utilisation with no obstructions in the form of protruding doors. HAWA-Concepta 25/30/40/50 is a true master of design thanks to a broad band width of available dimensions, weights and material thicknesses, and the combinations which are possible with HAWA-Folding Concepta 25.

## Application

Its advantages are obvious wherever variable room utilisation and unobstructed access should leave a tidy impression, for instance the home office in the bedroom, or to hide appliances in the kitchen or the washing machine in the bathroom. Even walk-in cabinets are realizable.

## Features of HAWA-Concepta 25

- Maximum door weight 25 kg (55 lbs.)  
→ door weight/height ratio
- Door width 300–750 mm ( $11\frac{13}{16}$ "– $2'5\frac{17}{32}$ ")
- Door height 1250–1850 mm ( $4'1\frac{7}{16}$ "– $6'0\frac{27}{32}$ ")
- Door thickness 19–50 mm ( $\frac{3}{4}$ "– $1\frac{31}{32}$ ")

## Features of HAWA-Concepta 30

- Maximum door weight 30 kg (66 lbs.)  
→ door weight/height ratio
- Door width 300–900 mm ( $11\frac{13}{16}$ "– $2'11\frac{7}{16}$ ")
- Door height 1851–2300 mm ( $6'0\frac{7}{8}$ "– $7'6\frac{9}{16}$ ")
- Door thickness 19–50 mm ( $\frac{3}{4}$ "– $1\frac{31}{32}$ ")

## Features of HAWA-Concepta 40



- Maximum door weight 40 kg (88 lbs.)  
→ door weight/height ratio
- Door width 300–900 mm ( $11\frac{13}{16}$ "– $2'11\frac{7}{16}$ ")
- Door height 1851–2500 mm ( $6'0\frac{7}{8}$ "– $8'2\frac{7}{16}$ ")
- Door thickness 19–50 mm ( $\frac{3}{4}$ "– $1\frac{31}{32}$ ")

## Features of HAWA-Concepta 50

- Maximum door weight 50 kg (110 lbs.)  
→ door weight/height ratio
- Door width 300–900 mm ( $11\frac{13}{16}$ "– $2'11\frac{7}{16}$ ")
- Door height 2301–2850 mm ( $7'6\frac{19}{32}$ "– $9'4\frac{7}{32}$ ")
- Door thickness 19–50 mm ( $\frac{3}{4}$ "– $1\frac{31}{32}$ ")

## Features of HAWA-Concepta 25/30/40/50

- HAWA-Concepta 25/30 with guide rollers, top and bottom
- HAWA-Concepta 40/50 with two-wheeled trolley, top
- Door is automatically pulled into pocket
- Well thought-out shock absorber in the end positions provides a high degree of movement comfort
- Unique scissor technology accommodates large and heavy doors
- All adjustments are made from the front
- All components are screwed onto the intermediate panel
- Wall recesses can be concealed without a cabinet body
- The same set can be used for left and right hand side applications
- The connector profile makes it easier to assemble cabinet designs with doors striking against the top and bottom cabinet sections
- Certified LGA

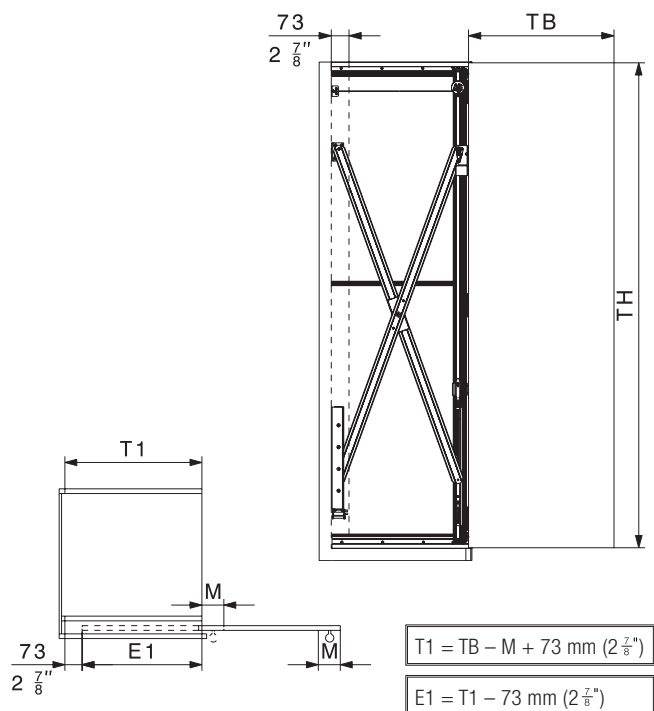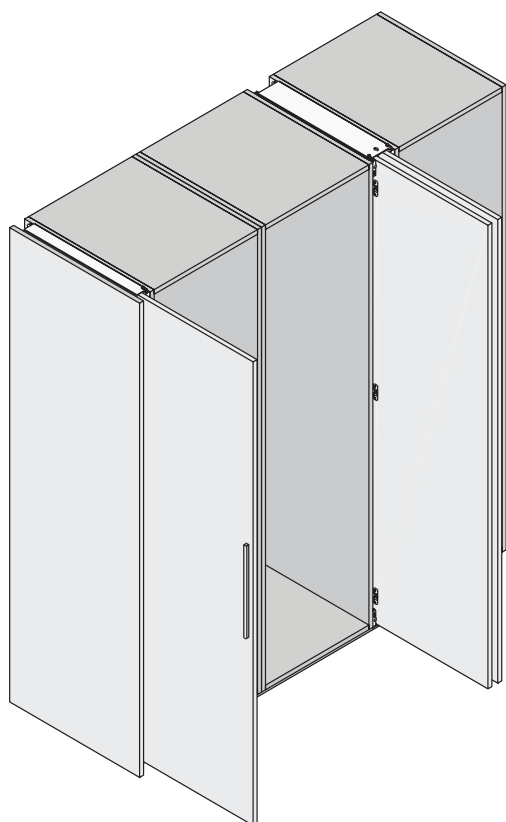


## Calculation hardware depth

|                         | T1                                                   | TH                                                                                   | E1                                                  |
|-------------------------|------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------|
| HAWA-Concepta 25        | ≤ 650 mm<br>(2'1 $\frac{13}{16}$ ")                  | 1250–1850 mm<br>(4'1 $\frac{7}{16}$ "–6'0 $\frac{27}{32}$ ")                         | ≤ 577 mm<br>(1'10 $\frac{23}{32}$ ")                |
| <b>HAWA-Concepta 30</b> | <b>≤ 900 mm<br/>(2'11<math>\frac{7}{16}</math>")</b> | <b>1851–2300 mm<br/>(6'0<math>\frac{7}{8}</math>"–7'6<math>\frac{9}{16}</math>")</b> | <b>≤ 827 mm<br/>(2'8<math>\frac{9}{16}</math>")</b> |
| HAWA-Concepta 40        | ≤ 900 mm<br>(2'11 $\frac{7}{16}$ ")                  | 1851–2500 mm<br>(6'0 $\frac{7}{8}$ "–8'2 $\frac{7}{16}$ ")                           | ≤ 827 mm<br>(2'8 $\frac{9}{16}$ ")                  |
| HAWA-Concepta 50        | ≤ 900 mm<br>(2'11 $\frac{7}{16}$ ")                  | 2301–2850 mm<br>(7'6 $\frac{19}{32}$ "–9'4 $\frac{7}{32}$ ")                         | ≤ 827 mm<br>(2'8 $\frac{9}{16}$ ")                  |

## Sets, HAWA-Concepta 25/30

|                                         | mm/inch                                                                                        | code         |
|-----------------------------------------|------------------------------------------------------------------------------------------------|--------------|
| HAWA-Concepta 25, set for 1 door        | 1250 – 1850<br>(4'1 <sup>7</sup> / <sub>16</sub> " – 6'0 <sup>27</sup> / <sub>32</sub> " )     | 25878        |
| <b>HAWA-Concepta 30, set for 1 door</b> | <b>1851 – 2300</b><br><b>(6'0<sup>7</sup>/<sub>8</sub>" – 7'6<sup>9</sup>/<sub>16</sub>" )</b> | <b>25879</b> |
| Sets contents: → page 42                |                                                                                                |              |

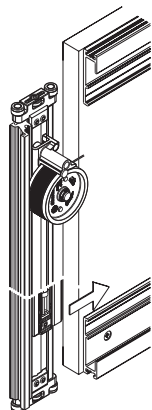

HAWA-Concepta 25/30

### Door weight / height ratio


The maximum weight must be adjusted in accordance with the size of the doors.

## HAWA-Concepta 25

| TB<br>TH                                                           | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700 | 750 |
|--------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 1850                                                               | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 24  | 23  | 22  |
| 1800                                                               | 25  | 25  | 25  | 25  | 25  | 25  | 25  | 23  | 22  | 21  |
| 1750                                                               | 25  | 25  | 25  | 25  | 25  | 25  | 24  | 22  | 21  | 21  |
| 1700                                                               | 25  | 25  | 25  | 25  | 25  | 25  | 24  | 21  | 21  | 20  |
| 1650                                                               | 25  | 25  | 25  | 25  | 25  | 25  | 23  | 21  | 20  | 19  |
| 1600                                                               | 25  | 25  | 25  | 25  | 25  | 24  | 22  | 20  | 19  | 18  |
| 1550                                                               | 25  | 25  | 25  | 25  | 25  | 24  | 21  | 19  | 18  | 18  |
| 1500                                                               | 25  | 25  | 25  | 25  | 25  | 23  | 21  | 18  | 18  | 17  |
| 1450                                                               | 25  | 25  | 25  | 25  | 24  | 22  | 20  | 18  | 17  | 16  |
| 1400                                                               | 25  | 25  | 25  | 25  | 24  | 21  | 19  | 17  | 16  | 15  |
| 1350                                                               | 25  | 25  | 25  | 24  | 23  | 21  | 18  | 16  | 16  | 15  |
| 1300                                                               | 25  | 25  | 25  | 24  | 22  | 20  | 18  | 15  | 15  | 14  |
| 1250                                                               | 25  | 25  | 24  | 23  | 21  | 19  | 17  | 15  | 14  | 13  |
| Door weight in Kg / TB = Door width in mm / TH = Door height in mm |     |     |     |     |     |     |     |     |     |     |

## Sets, HAWA-Concepta 40/50

|                                  | mm/inch                                                                                    | code  |
|----------------------------------|--------------------------------------------------------------------------------------------|-------|
| HAWA-Concepta 40, set for 1 door | 1851 – 2500<br>(6'0 <sup>7</sup> / <sub>8</sub> " – 8'2 <sup>7</sup> / <sub>16</sub> " )   | 25880 |
| HAWA-Concepta 50, set for 1 door | 2301 – 2850<br>(7'6 <sup>19</sup> / <sub>32</sub> " – 9'4 <sup>7</sup> / <sub>32</sub> " ) | 25881 |
| Sets contents: → page 43         |                                                                                            |       |

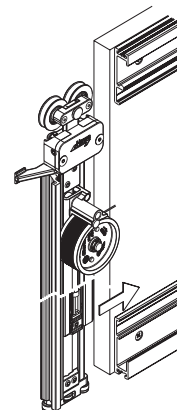

HAWA-Concepta 40/50

## HAWA-Concepta 40

| TB<br>TH                                                           | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700 | 750 | 800 | 850 | 900 |
|--------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 2500                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  |
| 2450                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 39  |
| 2400                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 38  |
| 2350                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 39  | 37  |
| 2300                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 38  | 36  |
| 2250                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 39  | 37  | 35  |
| 2200                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 38  | 36  | 34  |
| 2150                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 39  | 37  | 35  | 33  |
| 2100                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 38  | 36  | 34  | 32  |
| 2050                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 39  | 37  | 35  | 33  | 31  |
| 2000                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 38  | 36  | 34  | 32  | 30  |
| 1950                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 39  | 37  | 35  | 33  | 31  | 29  |
| 1900                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 40  | 38  | 36  | 34  | 32  | 30  | 28  |
| 1851                                                               | 40  | 40  | 40  | 40  | 40  | 40  | 39  | 37  | 35  | 33  | 31  | 29  | 27  |
| Door weight in Kg / TB = Door width in mm / TH = Door height in mm |     |     |     |     |     |     |     |     |     |     |     |     |     |

## HAWA-Concepta 30

| TB<br>TH                                                           | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700 | 750 | 800 | 850 | 900 |
|--------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 2300                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 29  | 27  | 26  |
| 2250                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 28  | 27  | 25  |
| 2200                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 29  | 27  | 26  | 24  |
| 2150                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 29  | 27  | 25  | 24  |
| 2100                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 28  | 26  | 25  | 23  |
| 2050                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 29  | 27  | 25  | 24  | 23  |
| 2000                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 29  | 26  | 25  | 23  | 22  |
| 1950                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 29  | 27  | 26  | 24  | 23  | 21  |
| 1900                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 29  | 27  | 25  | 23  | 22  | 21  |
| 1851                                                               | 30  | 30  | 30  | 30  | 30  | 30  | 30  | 28  | 26  | 24  | 23  | 21  | 20  |
| Door weight in Kg / TB = Door width in mm / TH = Door height in mm |     |     |     |     |     |     |     |     |     |     |     |     |     |

## HAWA-Concepta 50




| TB<br>TH                                                           | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700 | 750 | 800 | 850 | 900 |
|--------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 2850                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  |
| 2800                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  |
| 2750                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  |
| 2700                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 49  |
| 2650                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 48  |
| 2600                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 49  | 48  |
| 2550                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 48  | 47  |
| 2500                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 49  | 48  | 46  |
| 2450                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 49  | 48  | 47  | 45  |
| 2400                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 48  | 48  | 46  | 45  |
| 2350                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 49  | 48  | 47  | 45  | 44  |
| 2301                                                               | 50  | 50  | 50  | 50  | 50  | 50  | 50  | 49  | 48  | 47  | 46  | 45  | 43  |
| Door weight in Kg / TB = Door width in mm / TH = Door height in mm |     |     |     |     |     |     |     |     |     |     |     |     |     |











Subject to modification. Metric specifications are exact. Inches are approximate.

## Sets, HAWA-Concepta 25/30

|                                  | mm/inch                                                        | code  |
|----------------------------------|----------------------------------------------------------------|-------|
| HAWA-Concepta 25, set for 1 door | 1250 – 1850<br>(4'1 $\frac{7}{16}$ " – 6'0 $\frac{27}{32}$ " ) | 25878 |
| HAWA-Concepta 30, set for 1 door | 1851 – 2300<br>(6'0 $\frac{7}{8}$ " – 7'6 $\frac{9}{16}$ " )   | 25879 |

## Sets comprising


|                                                                                     |                                                                                 | 25878 | 25879 | code  |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-------|-------|-------|
|    | Upright, 1800 mm (5'10 $\frac{7}{8}$ " ),<br>alu plain anodized                 | 1     | –     | 22055 |
|                                                                                     | Upright, 2300 mm (7'6 $\frac{9}{16}$ " ),<br>alu plain anodized                 | –     | 1     | 24699 |
|    | Scissor action, complete,<br>900 mm (2'11 $\frac{7}{16}$ " ), galvanized steel  | 1     | –     | 22592 |
|                                                                                     | Scissor action, complete,<br>1500 mm (4'11 $\frac{1}{16}$ " ), galvanized steel | –     | 1     | 22593 |
|    | Front scissor guide,<br>alu plain anodized                                      | 1     | 1     | 25592 |
|    | Rear scissor guide,<br>alu plain anodized                                       | 1     | 1     | 25596 |
|   | Rear scissor bearing,<br>galvanized steel                                       | 1     | 1     | 25855 |
|  | Concealed hinge, spring-loaded,<br>for wooden door, galvanized,<br>3 pieces     | 1     | 1     | 22778 |
|  | Spaceer profil, 860 mm (2'9 $\frac{7}{8}$ " ),<br>plastic black, predrilled     | 1     | 1     | 22861 |
|  | Brush guide, set of 3 pieces,<br>plastic, black                                 | 1     | 1     | 25815 |








|                                                                                     |                                                                                                                       | 25878 | 25879 | code  |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------|-------|-------|
|    | Upright guide, with zero clearance,<br>with plastic rollers                                                           | 2     | 2     | 25656 |
|    | Bottom guide channel,<br>alu plain anodized,<br>728 mm (2'4 $\frac{31}{32}$ " ), predrilled                           | 2     | –     | 24533 |
|                                                                                     | Bottom guide channel,<br>alu plain anodized,<br>896 mm (2'11 $\frac{9}{32}$ " ), predrilled                           | –     | 2     | 24535 |
|    | Stop damper with retaining bracket                                                                                    | 1     | –     | 24661 |
|                                                                                     |                                                                                                                       | –     | 1     | 24660 |
|    | Door pull-in 25/50 with end position<br>soft closing system, plastic, black                                           | 1     | –     | 25814 |
|                                                                                     | Door pull-in 30/40 with end position<br>soft closing system, plastic, black                                           | –     | 1     | 25813 |
|   | Stop cover cap,<br>depth ajustable,<br>top left / bottom right                                                        | 1     | 1     | 24624 |
|  | Stop cover cap,<br>depth ajustable,<br>top right / bottom left                                                        | 1     | 1     | 24625 |
|  | Cover plates, stainless steel,<br>1 pair                                                                              | 1     | 1     | 24739 |
|  | Soft closing system for end position<br>and cover caps for scissor guide                                              | 1     | 1     | 25862 |
|  | Set of screws for concealed hinges,<br>4 x 16 mm ( $\frac{5}{16}$ " x $\frac{5}{8}$ " ), 10 pieces                    | 1     | 1     | 25935 |
|  | Screw set for fitting hardware to<br>cabinet body, 4,5 x 20 mm ( $\frac{3}{16}$ " x $\frac{25}{32}$ " ),<br>20 pieces | 1     | 1     | 22451 |
|  | Screw set for spacer profile,<br>PH 4 x 16 mm ( $\frac{5}{16}$ " x $\frac{5}{8}$ " ), 7 pieces                        | 1     | 1     | 25562 |
|  | Hex key, 3 mm ( $\frac{1}{8}$ " ), with handle                                                                        | 1     | 1     | 13164 |
|  | Installation aid, plastic, red                                                                                        | 1     | 1     | 25816 |

## Sets, HAWA-Concepta 40/50

|                                  | mm/inch                                                     | code  |
|----------------------------------|-------------------------------------------------------------|-------|
| HAWA-Concepta 40, set for 1 door | 1851–2500<br>(6'0 $\frac{7}{8}$ " – 8'2 $\frac{7}{16}$ ")   | 25880 |
| HAWA-Concepta 50, set for 1 door | 2301–2850<br>(7'6 $\frac{19}{32}$ " – 9'4 $\frac{7}{32}$ ") | 25881 |

## Sets comprising




|                                                                                     |                                                                                                                          | 25880 | 25881 | code  |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|-------|-------|-------|
|    | Upright, 2500 mm (8'2 $\frac{7}{16}$ "),<br>alu plain anodized                                                           | 1     | –     | 22056 |
|                                                                                     | Upright, 2760 mm (9'0 $\frac{21}{32}$ "),<br>alu plain anodized                                                          | –     | 1     | 22057 |
|    | Scissor action, complete,<br>1500 mm (4'11 $\frac{1}{16}$ "),<br>galvanized steel                                        | 1     | 1     | 22594 |
|    | Front scissor guide,<br>alu plain anodized                                                                               | 1     | 1     | 25592 |
|    | Rear scissor guide,<br>alu plain anodized                                                                                | 1     | 1     | 25596 |
|    | Rear scissor bearing,<br>galvanized steel                                                                                | 1     | 1     | 25855 |
|   | Concealed hinge, spring-loaded,<br>for wooden door, galvanized, 4 pieces                                                 | 1     | –     | 24217 |
|                                                                                     | Concealed hinge, spring-loaded,<br>for wooden door, galvanized, 5 pieces                                                 | –     | 1     | 22779 |
|  | Spacer profil, 860 mm (2'9 $\frac{7}{8}$ "),<br>plastic black, predrilled                                                | 1     | 1     | 22861 |
|  | Brush guide, set of 3 pieces,<br>plastic, black                                                                          | 1     | 1     | 25815 |
|  | Two-wheeled trolley alu,<br>with ball bearing wheels,<br>height-adjustable,<br>with torsion plate,<br>dull nickel finish | 1     | 1     | 24955 |

|                                                                                     |                                                                                                                      | 25880 | 25881 | code  |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------|-------|-------|
|    | Upright guide, with zero clearance,<br>with plastic rollers                                                          | 1     | 1     | 25656 |
|    | Top track, 896 mm (2'11 $\frac{9}{32}$ "),<br>alu plain anodized, predrilled                                         | 1     | 1     | 24528 |
|    | Bottom guide channel,<br>896 mm (2'11 $\frac{9}{32}$ "),<br>alu plain anodized, predrilled                           | 1     | 1     | 24535 |
|    | Stop damper with retaining bracket                                                                                   | 1     | 1     | 24660 |
|    | Door pull-in 25/50 with end position<br>soft closing system, plastic, black                                          | –     | 1     | 25814 |
|                                                                                     | Door pull-in 30/40 with end position<br>soft closing system, plastic, black                                          | 1     | –     | 25813 |
|   | Stop cover cap, depth adjustable,<br>top left / bottom right                                                         | 1     | 1     | 24624 |
|  | Stop cover cap, depth adjustable,<br>top right / bottom left                                                         | 1     | 1     | 24625 |
|  | Cover plates, stainless steel,<br>1 pair                                                                             | 1     | 1     | 24739 |
|  | Soft closing system for end position<br>and cover caps for scissor guide                                             | 1     | 1     | 25862 |
|  | Set of screws for concealed hinges,<br>4 x 16 mm ( $\frac{5}{16}$ " x $\frac{5}{8}$ "), 10 pieces                    | 1     | 1     | 25935 |
|  | Screw set for fitting hardware to<br>cabinet body, 4,5 x 20 mm ( $\frac{3}{16}$ " x $\frac{25}{32}$ "),<br>20 pieces | 1     | 1     | 22451 |
|  | Screw set for spacer profile,<br>PH 4 x 16 mm ( $\frac{5}{16}$ " x $\frac{5}{8}$ "), 7 pieces                        | 1     | 1     | 25562 |
|  | Hex key, 3 mm ( $\frac{1}{8}$ "), with handle                                                                        | 1     | 1     | 13164 |
|  | Installation aid, plastic, red                                                                                       | 1     | 1     | 25816 |


## Design option: Door striking against the top and bottom cabinet section

The implementation of cabinets using HAWA-Concepta 25/30/40/50 makes cabinet construction simple. In conjunction with the optionally available connector profile, the HAWA-Concepta 25/30/40/50 pivot/slide-in door hardware forms a modular overall system with extremely simple installation.


This makes it possible for single pivot/slide-in doors to be slid into a 55 mm niche or pairs of pivot/slide-in doors to be slid into a 110 mm niche. The Connector 55 and Connector 110 mm profiles can be used to connect the HAWA-Concepta 25/30 with guide rollers for lightweight doors and also connect the HAWA-Concepta 40/50 with a running gear for large and heavy doors.

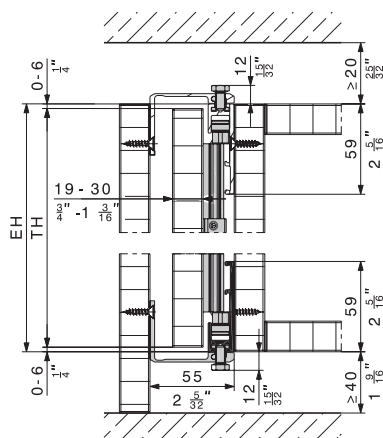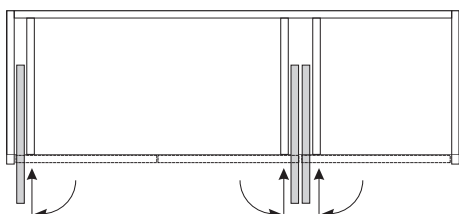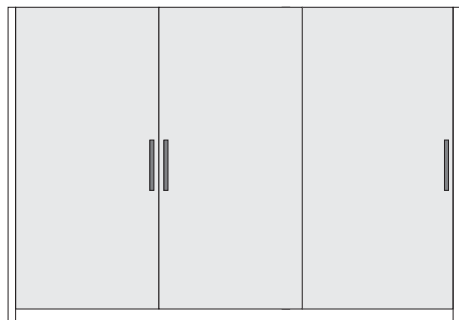


System: HAWA-Concepta 25/30  
Connection: Connector 55 mm ( $2\frac{3}{32}$ " )

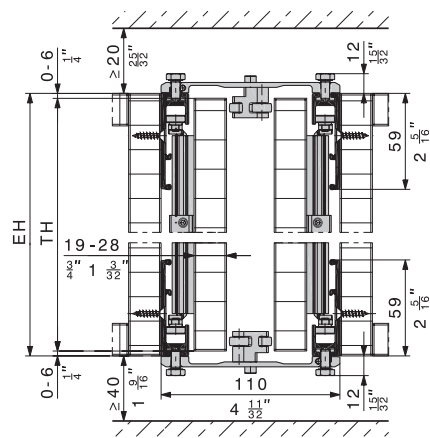


System: HAWA-Concepta 25/30  
Connection: Connector 110 mm ( $4\frac{11}{32}$ " )

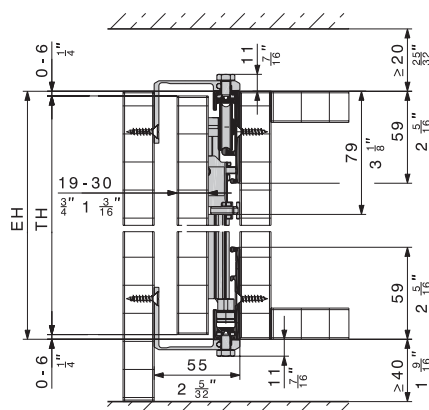


System: HAWA-Concepta 40/50  
Connection: Connector 55 mm ( $2\frac{3}{32}$ " )

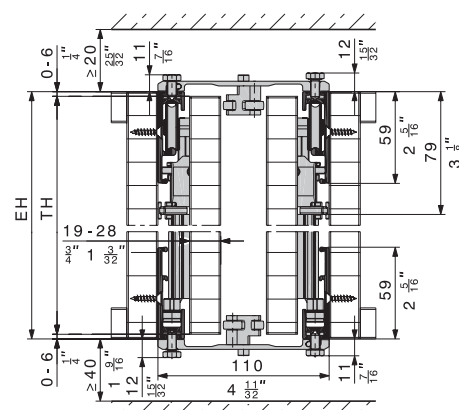

System: HAWA-Concepta 40/50  
Connection: Connector 110 mm ( $4\frac{11}{32}$ " )





Connector 55 mm ( $2\frac{3}{32}$ " )  
Maximum door thickness: 30 mm ( $1\frac{3}{16}$ " )



Connector 110 mm ( $4\frac{11}{32}$ " )  
Maximum door thickness: 28 mm ( $1\frac{1}{8}$ " )

## Connecting profile to the external side or cabinet body

|                                                                                                                                                                                 |                                                                                                      | mm/inch                        | code  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------|-------|
|  | Connector 55 mm (2 $\frac{3}{16}$ ")<br>for one pivot/slide-in door,<br>alu plain anodized, 2 pieces | 650<br>(2'1 $\frac{19}{32}$ ") | 25438 |
|   | Connector 55 mm (2 $\frac{3}{16}$ ")<br>for one pivot/slide-in door,<br>alu plain anodized, 1 piece  | 650<br>(2'1 $\frac{19}{32}$ ") | 23221 |
|                                                                                                                                                                                 |                                                                                                      | 900<br>(2'11 $\frac{7}{16}$ ") | 23222 |

## Connector for HAWA-Concepta 25/30/40/50


The Connector connection profile for the HAWA-Concepta 25/30/40/50 is a well-thought-out method of simplifying the assembly of designs with pivot/slide-in doors striking against the top and bottom cabinet sections. Assembly is not only easy but also quick and convenient: the cabinet side or body sections are placed adjacent to one another; the Connector connection profile is then inserted in the top tracks and bottom guide channels and screwed tight from above – job done.

### Features of Connector 55 mm (2 $\frac{3}{16}$ ")



- For recesses with a pivot/slide-in door made of wood: 19–30 mm ( $\frac{3}{4}$ "–1  $\frac{3}{16}$ ")
- The Connector compensates external side or cabinet body height differences of up to  $\pm 1.5$  mm (1  $\frac{1}{16}$ ")

### Typisch Connector 110 mm (4 $\frac{11}{32}$ ")


- For recesses with two pivot/slide-in doors made of wood: 19–28 mm ( $\frac{3}{4}$ "–1  $\frac{1}{8}$ ")
- The Connector compensates cabinet body height differences of up to  $\pm 1.5$  mm (1  $\frac{1}{16}$ ")



## Connecting profile to the cabinet body


|                                                                                                                                                                                                                                                     |                                                                                                                                                          | mm/inch                        | code  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------|
|                                                                      | Connector 110 mm (4 $\frac{11}{32}$ ")<br>for two pivot/slide-in doors,<br>alu plain anodized, 1 piece                                                   | 650<br>(2'1 $\frac{19}{32}$ ") | 23223 |
|                                                                                                                                                                                                                                                     |                                                                                                                                                          | 900<br>(2'11 $\frac{7}{16}$ ") | 23224 |
|  | Connector 110 mm (4 $\frac{11}{32}$ ")<br>for two pivot/slide-in doors,<br>alu plain anodized,<br>1 piece (for installation in front<br>of a fixed base) | 26<br>(1 $\frac{1}{32}$ ")     | 23225 |

### Connector 55 mm (2 $\frac{3}{16}$ ")



Connector 55 mm (2  $\frac{3}{16}$ ):  
recess for one pivot/slide-in door


### Connector 110 mm (4 $\frac{11}{32}$ ")




Connector 110 mm (4  $\frac{11}{32}$ ):  
recess for two pivot/slide-in doors

## Kitchen designs with and without a fixed base

The Connector for the HAWA-Concepta 25/30/40/50 is suitable for various kitchen designs. The same connector profile can be used for the top and bottom on designs with adjustable feet. A short 26 mm (1  $\frac{1}{32}$ ") profile is available for designs with a fixed base.



Design with adjustable feet  
Top/bottom profile: No. 23223/23224





Design with a fixed base  
Top profile: No. 23223/23224  
Bottom profile: No. 23225

## HAWA-Concepta 25/30/40/50: Further design options


The HAWA-Concepta 25/30/40/50 is suitable not only for sliding doors that strike against the cabinet into the cabinet body but also for inlaying doors made. Both variants can be installed in a wall recess without a cabinet body.

### Inlaying doors



HAWA-Concepta 25/30/40/50 can also be used to design inlaying fronts.

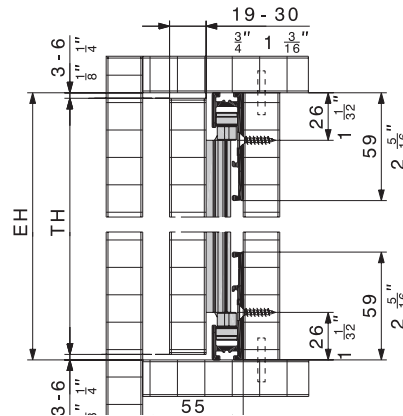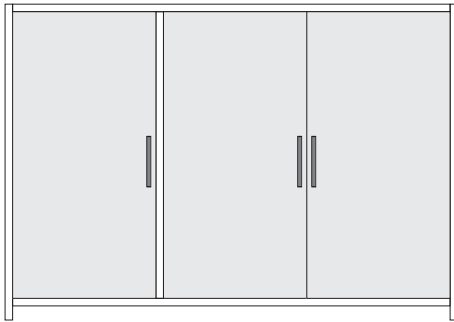

HAWA-Concepta 25/30

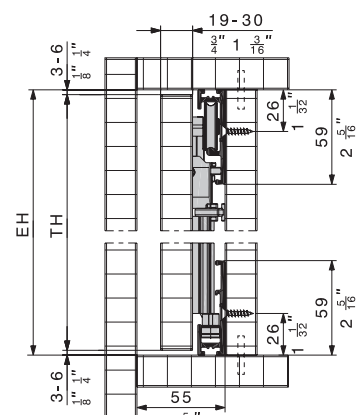

HAWA-Concepta 40/50

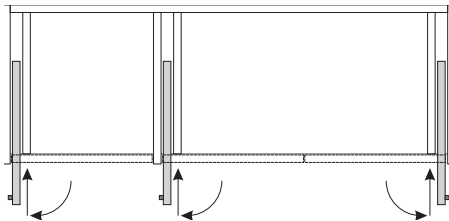




HAWA-Concepta 25/30/40/50

### Guide for two inlaid doors

The optional guide also allows two doors to be pushed into one pocket, also with inset structures.



#### Guide

|                                                                                                                                                           | code  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
|  <p>Guide for two pivot /slide-in doors, aluminium, plain anodized</p> | 25680 |

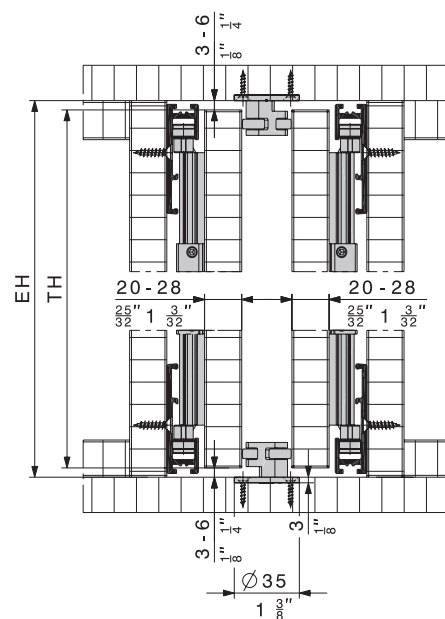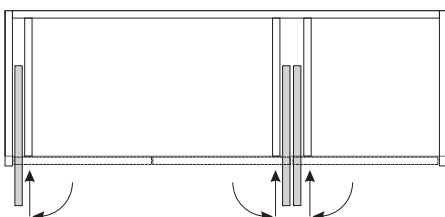


## Door in wall recess



The HAWA-Concepta 25/30/40/50 can also conceal wall recesses without a cabinet body.

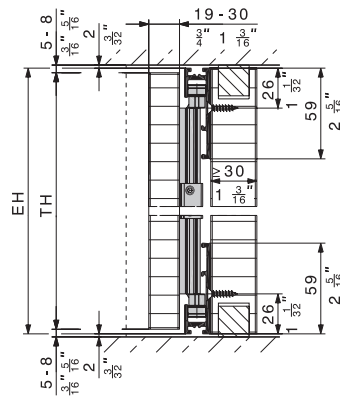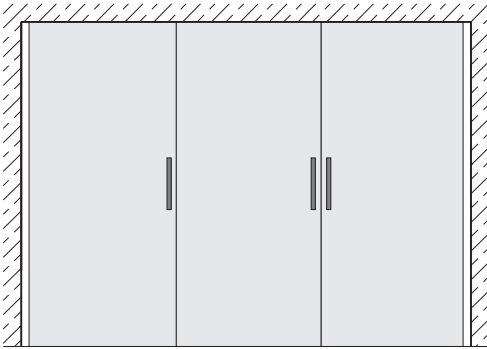

HAWA-Concepta 25/30

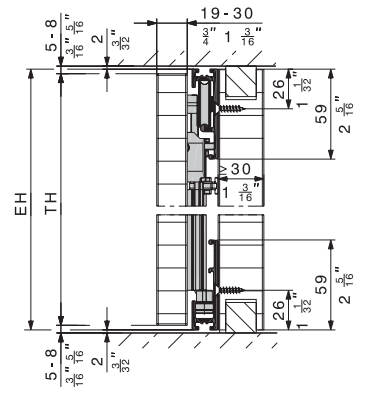

HAWA-Concepta 40/50

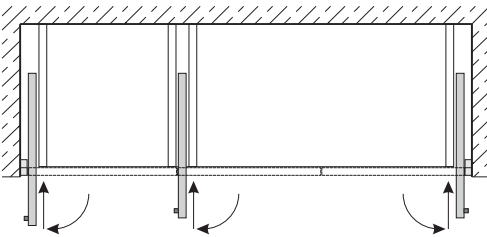


HAWA-Concepta 25/30/40/50



## Design variant: room partitioning solutions

Room-high designs for partitioning solutions are possible as the HAWA-Concepta 25/30/40/50 does not require top and bottom cabinet sections. All components are screwed onto the intermediate panel.

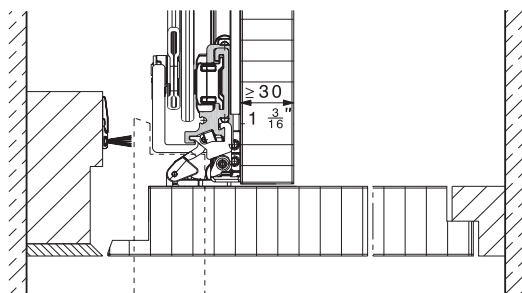


HAWA-Concepta 40/50

## Wood doors from 30 mm (1 3/16 inch)

Rabbets enable the installation of wood doors with thicknesses starting from > 30–50 mm (1 3/16 inch–1 31/32 inch)

### Rabbet dimensions


| S                                            | N1                         | N2                      | N3                        | N4                        |
|----------------------------------------------|----------------------------|-------------------------|---------------------------|---------------------------|
| 19–30 mm ( $\frac{3}{4}$ – $1\frac{3}{16}$ ) | 55 mm ( $2\frac{3}{16}$ )  | 0 mm                    | 0 mm                      | 0 mm                      |
| 33 mm ( $1\frac{5}{16}$ )                    | 58 mm ( $2\frac{3}{16}$ )  | 0 mm                    | 3 mm ( $\frac{1}{8}$ )    | 3 mm ( $\frac{1}{8}$ )    |
| 36 mm ( $1\frac{7}{16}$ )                    | 63 mm ( $2\frac{1}{2}$ )   | 2 mm ( $\frac{3}{32}$ ) | 6 mm ( $\frac{1}{4}$ )    | 5 mm ( $\frac{7}{32}$ )   |
| 39 mm ( $1\frac{7}{16}$ )                    | 67 mm ( $2\frac{11}{32}$ ) | 3 mm ( $\frac{1}{8}$ )  | 9 mm ( $\frac{3}{8}$ )    | 8 mm ( $\frac{5}{16}$ )   |
| 42 mm ( $1\frac{21}{32}$ )                   | 70 mm ( $2\frac{3}{4}$ )   | 3 mm ( $\frac{1}{8}$ )  | 12 mm ( $\frac{15}{32}$ ) | 11 mm ( $\frac{7}{16}$ )  |
| 45 mm ( $1\frac{25}{32}$ )                   | 75 mm ( $2\frac{15}{16}$ ) | 5 mm ( $\frac{7}{32}$ ) | 15 mm ( $\frac{19}{32}$ ) | 14 mm ( $\frac{9}{16}$ )  |
| 48 mm ( $1\frac{29}{32}$ )                   | 79 mm ( $3\frac{1}{8}$ )   | 6 mm ( $\frac{1}{4}$ )  | 18 mm ( $\frac{23}{32}$ ) | 17 mm ( $\frac{11}{16}$ ) |
| 50 mm ( $1\frac{31}{32}$ )                   | 83 mm ( $3\frac{9}{32}$ )  | 7 mm ( $\frac{9}{32}$ ) | 21 mm ( $\frac{27}{32}$ ) | 19 mm ( $\frac{3}{4}$ )   |

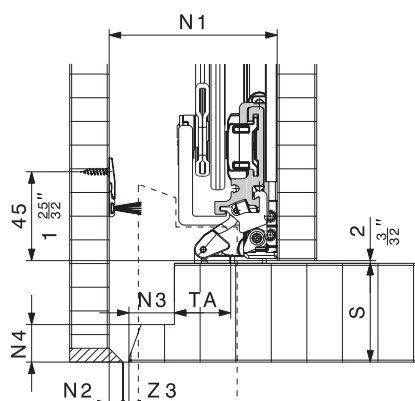

| Z3                      | TA                          |
|-------------------------|-----------------------------|
| 2 mm ( $\frac{3}{32}$ ) | 29.5 mm ( $1\frac{5}{32}$ ) |
| 3 mm ( $\frac{1}{8}$ )  | 28.5 mm ( $1\frac{1}{8}$ )  |
| 4 mm ( $\frac{5}{32}$ ) | 27.5 mm ( $1\frac{3}{32}$ ) |
| 5 mm ( $\frac{7}{32}$ ) | 26.5 mm ( $1\frac{1}{16}$ ) |

## Shock absorber: high operational convenience


The shock absorber stops the door gently and quietly when it is pulled out.

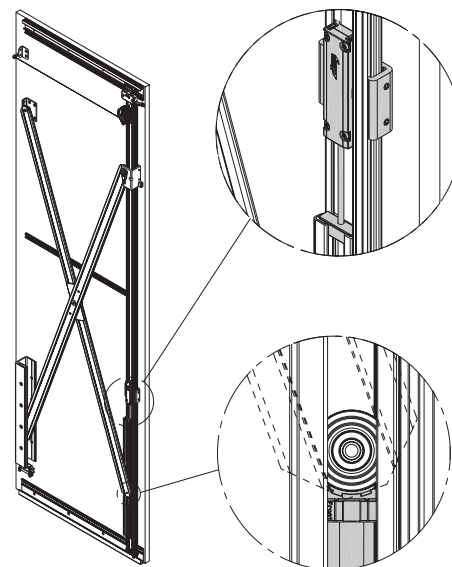

## Stop cover caps and depth adjustment

The stop cover caps are screwed onto the face side of the top tracks and fulfill the following functions:

- The integrated guide roller makes it easy to pivot the door and slide it in, positioning it in the closed position
- The closed front can be aligned by 0–2 mm (0 inch– $\frac{3}{32}$  inch) in the depth of the cabinet
- The hardware set includes a pair of stainless steel cover caps for extra visual appeal. They simply clip on to the stop cover caps

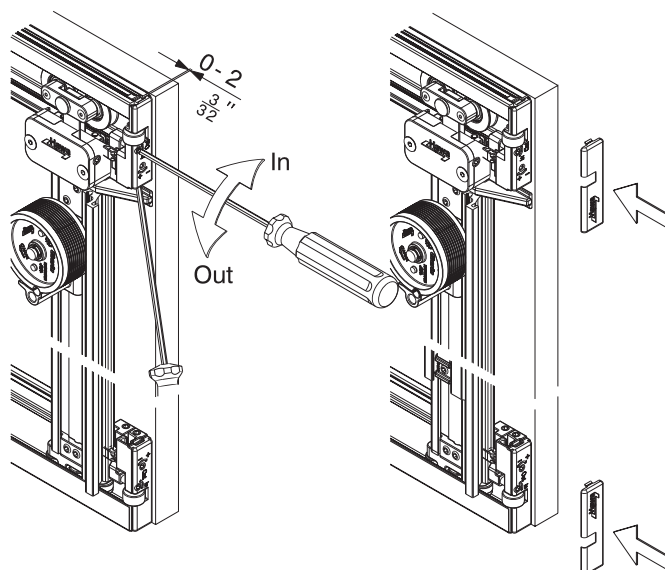

Front depth fine adjustment


Adjustment screw cover

## Door handles

|                                                                                                           |                                    | mm/inch                                     | code  |
|-----------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------|-------|
|                          | Door handle,<br>alu plain anodized | 400<br>(1'3 <sup>3</sup> / <sub>4</sub> " ) | 22692 |
| Please pay attention to the collision hazard when planning door handles in connection with the Connector. |                                    |                                             |       |


## Door handle height

The height of the door handle should be determined accordingly if two cabinet elements are designed so that the door opening of one cabinet meets with the insert of the adjacent cabinet. We recommend shell handles or flush pull handles to building owners.

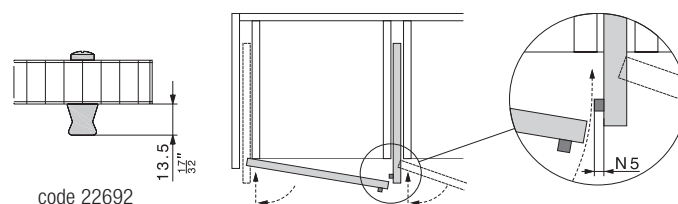


| Door handle                                                                 | S                                            | N5                                          |
|-----------------------------------------------------------------------------|----------------------------------------------|---------------------------------------------|
| Hawa code 22692                                                             | 19 mm ( <sup>3</sup> / <sub>4</sub> " )      | 13.5 mm ( <sup>17</sup> / <sub>32</sub> " ) |
| Provided by customer                                                        | ≤ 22 mm ( <sup>7</sup> / <sub>8</sub> " )    | 10 mm ( <sup>13</sup> / <sub>32</sub> " )   |
|                                                                             | ≤ 25 mm ( <sup>31</sup> / <sub>32</sub> " )  | 5 mm ( <sup>7</sup> / <sub>32</sub> " )     |
|                                                                             | ≤ 50 mm (1 <sup>31</sup> / <sub>32</sub> " ) | 2 mm ( <sup>3</sup> / <sub>32</sub> " )     |
| S = Door thickness<br>N5 = Maximum door handle height for adjacent cabinets |                                              |                                             |

## Aligner – Set for 1 wooden door

|                                                                                                                                                                                                                                                               |                                                                         | code  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------|
|                                                                                                                                                                            | Aligner for stabilisation<br>of wooden sliding door,<br>set of 2 pieces | 18705 |
| <ul style="list-style-type: none"> <li>for door thicknesses of 16–28 mm (<sup>5</sup>/<sub>8</sub>"–1 <sup>1</sup>/<sub>8</sub>" )</li> <li>for door heights up to 2600 mm (8'6 <sup>3</sup>/<sub>8</sub>" )<br/>(not suitable for solid hardwood)</li> </ul> |                                                                         |       |

## Aligner

The alignment hardware makes it easy to stabilise and adjust the pivot/slide-in doors. At least two hardware sets are recommended for each door and can be shortened as required.



## Order specifications

- Type and quantity of sets

## Optional order specifications

- Quantity of connecting brackets for external or cabinet body connections
- Quantity of door handles
- Quantity of aligner

## Planning/installation

For planning and installation purposes, please use the installation drawings:

- HAWA-Concepta 25/30 code 25737
- HAWA-Concepta 40/50 code 25738
- Connector for HAWA-Concepta 25/30/40/50 code 23227  
(→ [www.hawa.ch](http://www.hawa.ch) → HAWA-Productfinder)