



LEDYE

Domus Line
design

LED profile for recessed installation

Materials:

aluminium, PMMA, thermoplastic polymers

Finishes:

aluminium

Lighting source:

HE LED module (120 LED/m)

UHE LED module (240 LED/m) - on request

Wiring:




2000mm

Application type:

under cabinet, under shelf

Installation:

recessed



Colour appearance natural white
Colour temperature 4300 K
Luminous efficiency 85 lm/W
CRI Ra ≥ 80

Colour appearance warm white
Colour temperature 3100 K
Luminous efficiency 85 lm/W
CRI Ra ≥ 80

Colour appearance super warm white
Colour temperature 2700 K
Luminous efficiency 85 lm/W
CRI Ra ≥ 80

* values referring to LEDYE HE 1130mm



LEDYE HE TD


with touch dimmer switch



| Code | Length | Watt & Volt | Finish |
|--------------|--------|---------------|-----------|
| 1215005_*/HE | 380mm | 2,9W @ 24Vdc | aluminium |
| 1215105_*/HE | 530mm | 4,3W @ 24Vdc | aluminium |
| 1215205_*/HE | 830mm | 7,2W @ 24Vdc | aluminium |
| 1215305_*/HE | 1130mm | 10,1W @ 24Vdc | aluminium |

| Code | Light colour* |
|------|------------------|
| N | natural white |
| B | warm white |
| B1 | super warm white |

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

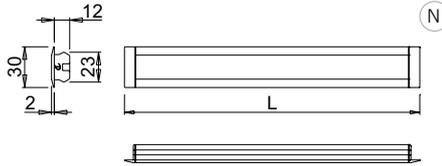

^(N) This drawing shows the profile's overall dimensions. See installation manual for more details.



LEDYE HE IFR


with presence sensor (PIR)



| Code | Length | Watt & Volt | Finish |
|--------------|--------|---------------|-----------|
| 1215405_*/HE | 380mm | 3,3W @ 24Vdc | aluminium |
| 1215505_*/HE | 530mm | 4,3W @ 24Vdc | aluminium |
| 1215605_*/HE | 830mm | 7,2W @ 24Vdc | aluminium |
| 1215705_*/HE | 1130mm | 11,4W @ 24Vdc | aluminium |

| Code | Light colour* |
|------|------------------|
| N | natural white |
| B | warm white |
| B1 | super warm white |

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

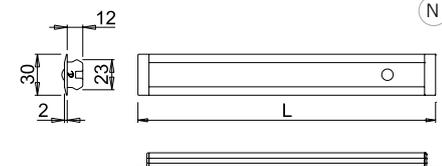

^(N) This drawing shows the profile's overall dimensions. See installation manual for more details.

LEDYE is a symmetrically light projecting profile for recessed installation on milled grooves only 12 mm deep. It is supplied with a 2,000-mm power cord and Micro24 polarised connector as standard. **LEDYE** is ideal for installation under cabinets and shelves. Custom versions for through-milled grooves are available on request.

LEDYE profile alone with relative accessories (screen and heads) for customisation also available. For details consult the **Flexyled collection catalogue** available also on www.domusline.com



LEDYE HE TD
with touch dimmer switch

LEDYE HE TD has an electronic touch dimmer switch, which adjusts the brightness and turns the luminaire on and off "at a touch".



LEDYE HE IFR
with presence sensor

LEDYE HE IFR's passive infrared sensor detects movement and temperature changes within a symmetrical cone of around 80 degrees. See the infographic for more details on the operation and correct installation of **LEDYE HE IFR**.



For LED converters and accessories see page 76 or consult the **Domus Extra catalogue** also available on www.domusline.com.



¹ For UL-certified model codes, see the **American standard LED collection catalogue**, also available at www.domusline.com.



SMART FITTING SYSTEM

LEDYE is equipped with a smart fitting system using a steel clip with lateral pressure. This allows the profile to be installed quickly with no need for glue. The system also means the profile can easily be removed from the milled groove if necessary.

