

NEXIS CLICK-ON 04

100° hinge (Door thicknesses up to 24 mm)



- 100° opening angle
- Optimum reveals with door thicknesses up to 24 mm
- Soft-close compatible
- With shallow cup depth (11 mm) also suitable for soft-formed doors
- 3-dimensional adjustment with appropriate mounting plate

Available in 2 versions:

- With self-closing mechanism (spring)
- Without self-closing mechanism (spring) for use with Tipmatic

ORDER INFORMATION

Door overlay		Material		Cranking	with spring	Item No.	
		Cup	Arm			Click-on Screw fixing	Click-on Press fitting
Full overlay		Steel, nickel-plated	Steel, nickel-plated	-2	■	F015072739	-
				0	■	F015072722	F015072719
Half overlay		Steel, nickel-plated	Steel, nickel-plated	8	■	F015072729	F015072727
					-	F015072730	-
Inset		Steel, nickel-plated	Steel, nickel-plated	15	■	F015072736	F015072732
					-	F015072738	-

COVER CAPS

	Designation	Cranking	Imprinted/Embossed	Item No.
	Hinge arm cover cap, steel, short, nickel-plated, not imprinted, Soft-close compatible	-2/0	On request	F069073570
	Hinge arm cover cap, steel, open, nickel-plated, not imprinted, Soft-close compatible	8/15	On request	F069073669

ACCESSORIES

	Designation	Item No.		Designation	Item No.
	Tipmatic Plus Click-on set	F069073752		Countersunk wood screw Ø 3.5 x 15 mm	F146073976
	Soft-close Click-on set	F069073714		Hinge cup cover cap, steel, nickel-plated, not imprinted	F069073687

Nexis Click-on mounting plates	218
Accessories	226

Soft-close Click-on	286
Tipmatic Plus Click-on	302

Technical information	228
Assembly aids	364

INSTALLATION INFORMATION

All dimensions in millimetres

Full overlay		K-2/0		Half overlay		K8		Inset		K15									
Mounting plate height 2		Mounting plate height 2		Mounting plate height 4															
Door overlay	Cup distance					Door overlay	Cup distance					Door reveal	Cup distance						
	-2	3	4	5	6		0	8	3	4	5		6	15	3	4	5	6	
	21				0		19	11					0	0					
	20				0		18	10			0								
	19			0			17	9			0			2					
	18	0			2		16	8	0		2		3						
	17			2	3		15	7		2	3		4						
	16	2	3	4			14	6	2	3	4								
	15	3	4				13	5	3	4									
	14	4					12												
Mounting plate height		Mounting plate height		Mounting plate height		Mounting plate height		Mounting plate height		Mounting plate height									

MINIMUM GAP

Door thickness	Cup distance				
	3	4	5	6	
16	0.5	0.5	0.5	0.5	
18	0.5	0.5	0.5	0.5	
19	0.5	0.5	0.5	0.5	
20	0.0	0.0	0.0	0.5	
22	0.5	0.5	0.5	0.8	
24	0.5	0.5	0.5	1.1	
Minimum gap					

MINIMUM REVEAL

Door thickness	Cup distance				
	3	4	5	6	
16	0.6	0.6	0.6	0.6	
18	0.9	0.9	0.9	0.9	
19	1.1	1.1	1.1	1.1	
20	1.4	1.4	1.4	1.4	
22	1.9	1.9	1.9	1.9	
24	2.5	2.5	2.5	2.5	
Minimum reveal (F)					

NOTES



The minimum gap is the clearance required between the front edge of the cabinet and the closed door so that the door can open without hindrance.

Important: Reveals were calculated for doors with a radius of 1 mm!

Hinge dimensions and reveal calculation with factory setting.

We recommend a trial fitting.

DRILLING PATTERNS

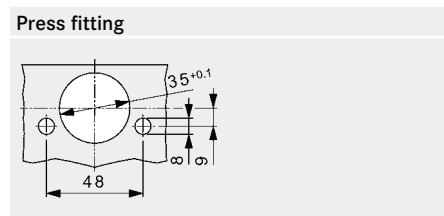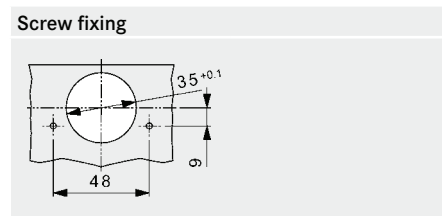

CUP DIMENSIONS

