



PushOpen Short



Technical details

PushOpen Short



With bumper


14 915-7187 → 350 380 383 390

With magnet

14 915-7185 → 350 380 383 390

100 Pcs Made of steel and plastic


Housing Short

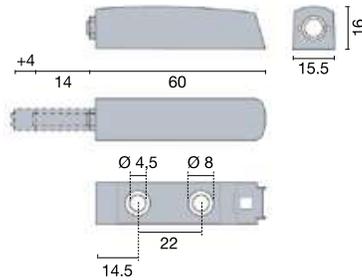

915-7192 → 350 380 383 390

100 Pcs Made of plastic

Fixing screws for housing



Chipboard screws
820-6328-050
10000 Pcs


Accessories for PushOpen with magnet (Nickel plated steel)

Counter plate self adhesive



A = Ø15 915-7159-050 500 Pcs


Counter plate



A = Ø10 B = Ø5 915-7196-050 500 Pcs

A = Ø15 B = Ø8 915-7190-050 500 Pcs

Knock-in Counter plate




A = Ø10 B = Ø2.8 915-7199-050 500 Pcs

- Effortless opening with just a light touch
- Depth adjustment ensures reliable opening

i PushOpen with bumper works with standard hinge
 PushOpen with magnet works with reverse spring or unprung hinges

Door adjustment




Depth adjustment
 +4/0mm

Drilling pattern and mounting procedure



Depth adjustment

Without housing




Adjustment made by rotating the depth adjustment screw

With housing




Application on door for Counter plates




Pre-drilled hole
 ØB x 10mm

Application on door for Counter plate with double side tape and knock-in counter plate



Sticking or knock-in position

Positioning



Close to the 'touch opening point' on the side opposite to hinges