


SLIM 100/24D



Code	0865401
------	---------

**220V
240V**

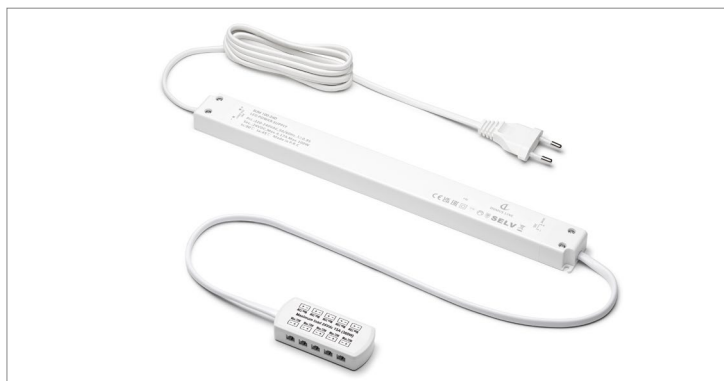

24Vdc



Rated voltage	220-240 VAC
Frequency	50/60 Hz
Output voltage	24 VDC
Pcg (Maximum output power)	100 W
Full-load efficiency	95%
Pno (No-load power)	n.a.
Psb (Stand by power)	n.a.
Pnet (Network stand by power)	n.a.
Ta (Operation temperature)	-20... +45 °C
Tc (Enclosure temperature)	90 °C max
Dimension L x B x H	321 x 30 x 18,5 mm
Net weight	378 g

CE UK ENEC EAC SELV



Features

- IP20 independent electronic control gear for LED luminaires.
- Class II protection against electric shocks from direct and indirect contact.
- Equipped with protection for over temperature, against overload and over mains voltage.
- Primary wired with a 1800mm power cable and EU plug.
- Secondary wired with a 500mm cable and Micro24 10-slot female connector 3A.
- Not dimmable on the primary.
- Internal use.
- Compliant with the EU regulation Ecodesign requirements for external power supplies.