



SMALLY XS 24

Domus Line
design

LED spotlight with diffuse light projection

Materials:

thermoplastic polymers, PMMA

Finishes:

chrome plated, aluminium, satin nickel,
steel, black touch, white matt

Light source:

SMD LED module

Connector:

Micro24

Wiring:

2000mm

Application type:

universal

Installation:

recessed and on surface

Patented



SMALLY XS PLUS 24 is a spotlight designed for **recessed installation in a hole Ø57mm and just 12mm deep**. It is installed on wood panels with both through and blind holes. **SMALLY XS PLUS 24** incorporates a high-performance SMD LED module with no-dot effect technology, ensuring a uniform projection beam without the dot effect.

Colour appearance natural white

Colour temperature 4300 K

Luminous flux 390 lm

Luminous efficiency 130 lm/W

CRI Ra ≥ 80


Colour appearance super warm white

Colour temperature 2700 K

Luminous flux 360 lm

Luminous efficiency 120 lm/W

CRI Ra ≥ 80

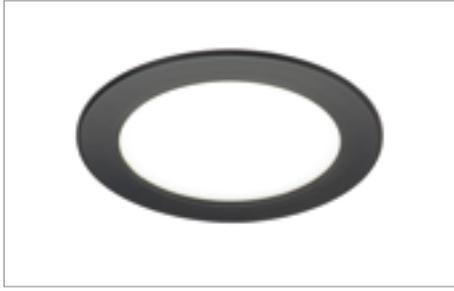

SMALLY XS PLUS 24




Code	Watt & Volt	Light colour
	3W @ 24Vdc	natural white
	3W @ 24Vdc	super warm white

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



Code	Finish
09	chrome plated
10	aluminium
17	satın nickel
19	steel
46	black touch
54	white matt



(N) This drawing shows the spotlight's overall dimensions. See installation manual for more details.



SMALLY XS PLUS 24 features the innovative **Plug&Play system (patented)**, for easy disconnection of the power cord from the spotlight.



Spacers are available on request for surface installation:

Code	Finish
20125_ _	see finishes codes



Inclined spacers are available on request for surface installation:

Code	Finish
20124_ _	see finishes codes

FINISHES



CHROME PLATED (code 09)




ALUMINIUM (code 10)



SATIN NICKEL (code 17)



STEEL (code 19)



BLACK TOUCH (code 46)



WHITE MATT (code 54)



For LED converters and accessories consult the **Domus Extra catalogue** also available on www.domusline.com.

