



# T-type-i 110/45°

45° angled application for wood doors






- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details

	Interaxis 45mm	Interaxis 48mm
Cup type		
Item number		

Cranking  
17mm



	<b>701-0B08-650</b>	701-0B10-650
	701-0C78-650	701-0C80-650
	701-0C54-650	701-0C56-650

Drilling patterns for hinge cups → see page 2.17

100 Pcs

Cup made of steel, arm made of zinc

## Mounting plates



Cam adjustable cruciform mounting plate  
→ see page 2.81



Cruciform mounting plate  
→ see page 2.83




Cam adjustable linear mounting plate  
→ see page 2.81



Face frame adapter plate  
→ see page 2.83

## Hinge cup screws

If not pre-mounted



**820-6328-050**

10000 Pcs

## Accessories



Cover caps for hinge arm  
→ see page 2.177





Hinge angle restrictor  
→ see page 2.175

## Legend of hinge cup symbols


Screw-on ready  
← screws

Machine insertion ready


EasyFix system



Damping adjustment




Door adjustment

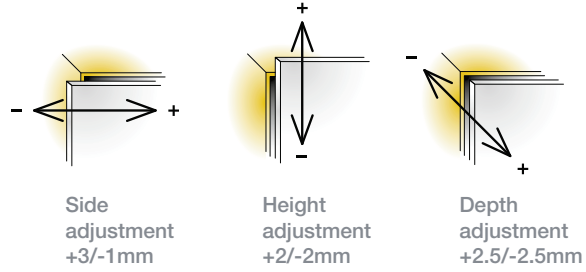


For further explanation → see page 2.25

For further explanation → see pages 2.22-2.24

Mounting details

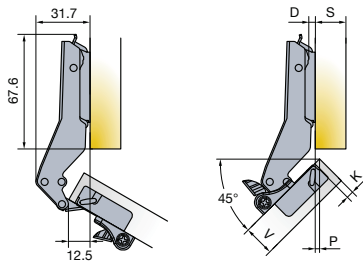

Mounting plate drilling distance





Mounting plate thickness table

For further explanation → see page 2.13

P	0	0.5	1	1.5	2	2.5	3	3.5	4
3		2		1		0			
4	3		2		1		0		
5		3		2		1		0	
6	4		3		2		1		0 D

Drawings show application on D=0mm mounting plate

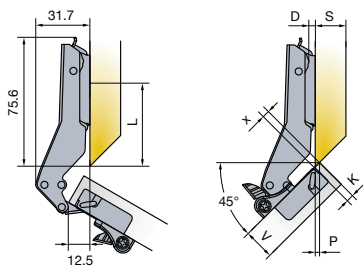

X	0	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	6
3	2			1			0					
4			2			1			0			
5		3			2			1			0	
6	4			3			2			1		0 D

Drawings show application on D=0mm mounting plate

L=45 for thickness D=0  
L=44 for thickness D=1  
L=43 for thickness D=2  
L=42 for thickness D=3  
L=41 for thickness D=4

Touch opening



PushOpen Solutions  
→ see pages 2.199-2.204

Door clearance at R=1mm

For further explanation → see page 2.14



V	16	17	18	19	20	21	22	23	24	25	26
3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9 F <sub>MIN</sub>

Gap Z<sub>MIN</sub>=0