



T-type 170

For wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

165°
35mm
12mm
3Way snap-on




Technical details

	Interaxis 45mm	Interaxis 48mm
Cup type		
Item number	702-0EK0-054	702-0EL0-054
Item number	702-0EK1-054	702-0EL1-054
EasyFix	702-0EK4-054	702-0EL4-054

Drilling patterns for hinge cups → see page 2.17

Cranking

0mm



50 Pcs

Made of steel and zinc

Mounting plates



Cam adjustable cruciform mounting plate
→ see page 2.81



Cruciform mounting plate
→ see page 2.83




Cam adjustable linear mounting plate
→ see page 2.81



Face frame adapter plate
→ see page 2.83

Hinge cup screws

If not pre-mounted



820-6328-050

10000 Pcs

Accessories




Hinge angle restrictor
→ see page 2.175

Legend of hinge cup symbols


Screw-on ready
← screws

Machine insertion ready

EasyFix system




Door adjustment

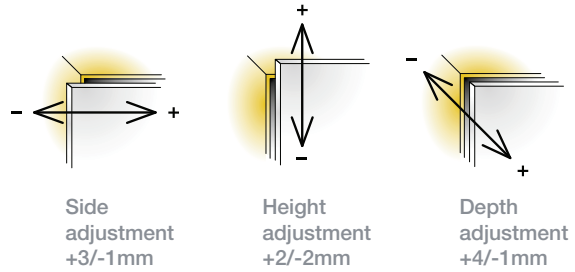


For further explanation → see pages 2.22-2.24

Mounting details



Drawings show application on D=0mm mounting plate
No door protrusion in 90° position

Mounting plate drilling distance



Mounting plate thickness table

For further explanation → see page 2.13

X	13	14	15	16	17	18	19
K	3	3	2	1	0		
	4	4	3	2	1	0	
	5		4	3	2	1	0
	6			4	3	2	1

$D=13+K-X$

Soft closing systems



Glissando TL 170
→ see page 2.191



Glissando CR
→ see page 2.195


Touch opening



PushOpen Solutions
→ see pages 2.199-2.204

Door clearance at R=1mm

For further explanation → see page 2.14



V	16	17	18	19	20	21	22	23	24
3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K 5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.1 F _{MIN}

Gap Z_{MIN}=0.5